



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)


(51) International Patent Classification <sup>7</sup> : <b>H04N 7/00, 7/24, 5/00</b>		<b>A1</b>	(11) International Publication Number: <b>WO 00/27114</b>
			(43) International Publication Date: 11 May 2000 (11.05.00)
(21) International Application Number: PCT/US99/25322		(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).	
(22) International Filing Date: 28 October 1999 (28.10.99)			
(30) Priority Data: 60/106,508 30 October 1998 (30.10.98) US 60/107,965 12 November 1998 (12.11.98) US 60/113,444 23 December 1998 (23.12.98) US			
(71) Applicant (for all designated States except US): GENERAL INSTRUMENT CORPORATION [US/US]; 101 Tournament Drive, Horsham, PA 19044 (US).			
(72) Inventors; and (75) Inventors/Applicants (for US only): PETERKA, Petr [US/US]; 5126 Caminito Vista Lujo, San Diego, CA 92130 (US). KASSMAN, Todd [US/US]; 470 Naiad Street, Encinitas, CA 92024 (US). MANGALORE, Geetha [IN/US]; 11674 Spring Side Road, San Diego, CA 92128 (US).			
(74) Agent: LIPSITZ, Barry, R.; Building No. 8, 755 Main Street, Monroe, CT 06468 (US).		<p><b>Published</b></p> <p><i>With international search report.</i></p> <p><i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i></p>	

(54) Title: APPLICATION PROGRAMMING INTERFACE FOR ENABLING A DIGITAL TELEVISION RECEIVER TO ACCESS SYSTEM INFORMATION IN AN ABSTRACT FORMAT

## (57) Abstract

An application programming interface (API) allows applications (e.g., applets) at a digital television terminal to recover System Information (SI) from a digital transport stream without regard to the specific SI format. The API abstracts the relevant portions of the SI to provide it in a generic, usable format. The system is suitable for use, e.g., with SI formats including MPEG Program Specific Information (PSI), DVB SI, ATSC Program and System Information Protocol (PSIP), Cable SI such as Digital Video Standard 234, and private SI. In an optional embodiment, asynchronous delivery of SI is provided for SI that

is not immediately available in the terminal's memory. Additionally, the API can further abstract the SI so that it is independent of the specific transport stream format (e.g., MPEG-2). Moreover, incremental retrieval of SI data is provided by allowing an application to obtain a small subset of the SI that is available at the terminal, analyze it, and retrieve additional SI if required based on the analysis. The API includes a navigation package (110), a program guide package (120), a program selection/tuning package (130), a descriptor package (140), a utility package (150), a data package (160), and a pipeline package (170).

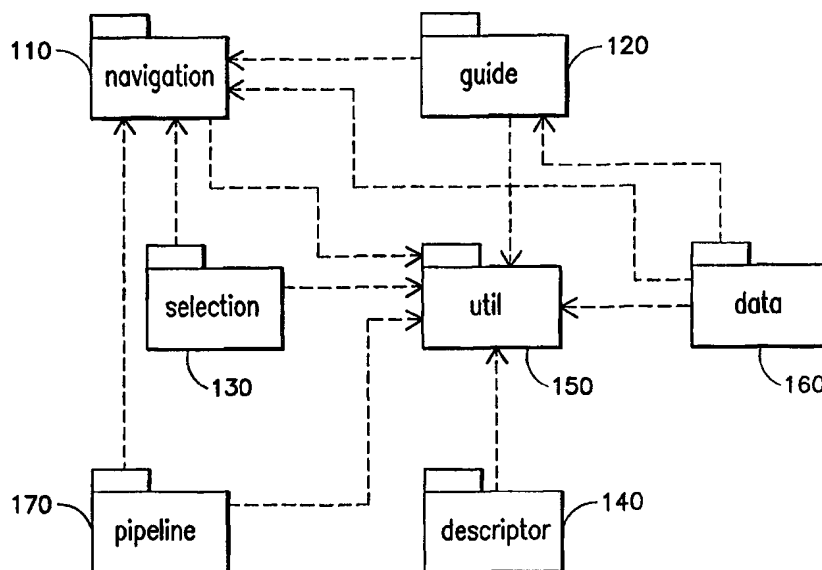

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakistan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

APPLICATION PROGRAMMING INTERFACE FOR ENABLING A  
DIGITAL TELEVISION RECEIVER TO ACCESS SYSTEM  
INFORMATION IN AN ABSTRACT FORMAT

BACKGROUND OF THE INVENTION

5           This application claims the benefit of U.S.  
Provisional Application Nos. 60/106,508, filed October  
30, 1998, 60/107,965, filed November 12, 1998, and  
60/113,444, filed December 23, 1998.

The following acronyms are used:

10           A/V - Audio/Video  
API - Application Programming Interface  
ATSC - Advanced Television Systems Committee  
BAT - Bouquet Association Table (DVB)  
CA - Conditional Access  
15           CAT - Conditional Access Table (MPEG)  
CNN - Cable News Network  
DAVIC - Digital Audio-Video Council  
DCII - GI Digicipher II (tm)  
DIT - Data Information Table  
20           DTV - Digital Television  
DVB - Digital Video Broadcasting  
DVS - Digital Video Standard  
EIT - Event Information Table (DVB/ATSC)  
EMM - Entitlement Management Message  
25           EPG - Electronic Program Guide  
ETT - Extended Text Table (ATSC)  
FCC - Federal Communications Commission  
GIC - General Instrument Corporation  
GPS - Global Positioning Satellite  
30           ID - Identifier

	IP - Internet Protocol
	JMF - Java Media Framework (Sun Microsystems)
	MGT - Master Guide Table (ATSC)
	MPAA - Motion Picture Association of America
5	MPEG - Moving Pictures Expert Group
	MSP - Message Stream Protocol
	NIT - Network Information Table (DVB)
	NVOD - Near Video-On-Demand
	PID - Packet Identifier
10	PMT - Program Map Table
	PSI - Program Specific Information
	PSIP - Program and System Information Protocol (ATSC)
	RRT - Rating Region Table (ATSC)
15	SCTE - Society of Cable Television Engineers
	SDT - Service Description Table (DVB)
	SI - System Information
	STT - System Time Table
	TDT - Time Date Table (DVB)
20	TOT - Time Offset Table (DVB)
	TS - Transport Stream
	TSDT - Transport Stream Descriptor Table (MPEG)
	UML - Unified Modeling Language
	URL - Uniform Resource Locator
25	VCT - Virtual Channel Table
	VSB - Vestigial Side Band

The present invention provides an API for accessing Program and System Information that describes the layout and content of an MPEG-2 TS. This

information, also known as service information, is generally called System Information (SI).

There are different formats of SI used and standardized today. These include the original ATSC A56 standard, which is a subset of the DigiCipher II (DCII) MSP, used for both satellite and cable television transmission, and the new ATSC PSIP for terrestrial and cable DTV, Cable SI such as DVS (SCTE DVS 234: Service Information Carried Out-Of-Band For Digital Cable Television), and the DVB SI standard. Private data, such as that in the DigiCipher II standard that is proprietary to GIC, the assignee of the present invention, may also be used.

The ATSC standard is described in "Program and System Information Protocol for Terrestrial Broadcast and Cable," Doc. A/65, 23 Dec 1997, available from the ATSC. The DVB standard is described in "Digital Video Broadcasting (DVB); Specification for Service Information (SI) in DVB systems," EN 300 468 v1.3.1 (1998-02), available from the European Broadcasting Union or the European Telecommunications Standards Institute.

Subscriber terminals receive the SI via a network. A set-top terminal, also referred to as an Integrated Receiver-Decoder (IRD) or a subscriber terminal, is a device that receives and decodes television signals for presentation by a television. The signals can be delivered over a satellite, through a cable plant, or by means of terrestrial broadcast, for example. Various applications have been proposed, or are currently available, via modern set tops, including

video on demand (VOD), audio on demand, pay-per-view, interactive shopping, electronic commerce, electronic program guides, Internet browsers, mail services (e.g., text e-mail, voice mail, audio mail, and/or video  
5 mail), telephony services, stock ticker, weather data, travel information, games, gambling, banking, shopping, voting, and others. Applications may also enable Internet connectivity and possibly Internet-based telephony. The set top functionality is enabled  
10 through specialized hardware and software.

The applications may be downloaded by terminals via a network, loaded locally (e.g., via a smart card), or installed at the time of manufacture, for example.

However, the subscriber terminal that receives the  
15 SI must know which format is being used, and provide corresponding processing that is specific to that protocol. This is problematic since it forces the development of special code (software) at the terminal for accessing the SI. Thus, the cost, complexity, and  
20 computational requirements of the terminals are increased, and the development of software for the terminal is impaired.

The above problems are highlighted by the trend toward integration broadband distribution networks,  
25 telephony networks, and computer networks such as the Internet and in-home networks, and by the desire to enable new types of applications that provide a feature-rich experience for the viewer.

Accordingly, it would be desirable to provide a  
30 system for accessing SI in a digital transport or other

data stream that is compatible with different SI formats.

The system should abstract common elements of the SI from the different formats to provide "abstract SI." 5 The "abstract SI" should provide access to SI that is useful to an application at such a level of abstraction that the application does not have to be aware of what SI standard format is used to deliver the information to the receiver.

10 The system should avoid the need for the application to have special code (software) when it is intended to run in different environments, such as DVB, SCTE and ATSC-based systems.

The system should be suitable for use with SI that 15 is provided using different formats, including MPEG Program Specific Information (PSI), Digital Video Broadcasting Service Information (DVB SI), Advanced Television Systems Committee Program and System Information Protocol (ATSC PSIP), Cable SI such as DVS, 20 and private SI, such as those in the DCII system.

The system should allow different applications to retrieve only the specific SI they require.

The system should allow an application to retrieve a specific descriptor from the SI if needed.

25 A descriptor refers to a mechanism for extending table data. Generally, the various digital video standards allows the use of various types of tables of data for carrying SI. For example, a table may designate locations in a TS (e.g., PID, frequency) at 30 which a particular channel or program is carried.

Moreover, since tables are fixed structures that are difficult to extend over time to accommodate additional information, descriptors have been developed as an extension mechanism. A descriptor can be  
5 appended in an outer loop or inner loop of the table. In an outer loop, the descriptor is appended at the end of the table and provides additional table entries each time the entire table is read. In an inner loop, the  
10 descriptor is appended at the end of a portion of the table and provides additional table entries each time that of the table is read.

A descriptor may comprise a tag followed by a field or string of information, for instance.

15 Descriptors are only included as needed, and do not interfere with receivers that have not been updated to recognize them.

Additionally, the system should make use of URL syntax concepts that are currently being defined for DTV.

20 The system should be implementable in an API at a subscriber terminal in a television network.

The API should be compatible with Java(tm), ActiveX(tm) or an equivalent type of component-based object-oriented technology.

25 The system should optionally provide asynchronous delivery of results, separation of MPEG-2 specific data from a TS, and incremental retrieval of SI data.

The system should be compatible with a URL locator syntax. Note that a URL definition for DTV is still  
30 being established. The current API definition supports



the DAVIC DVB URL and the GIC-proposed DTV and ATSC URLs.

The present invention provides a system having the above and other advantages.

### SUMMARY OF THE INVENTION

The present invention provides an API that allows applications that are running on a digital television terminal to recover SI from a digital TS without regard to the specific format type. The API abstracts the relevant portions of the SI to provide it in a format that is usable by different applications at the terminal.

Additionally, a Descriptor sub-package described below allows an application to retrieve a specific DVB or ATSC or private (e.g., DCII) descriptor if it has a special need to do so.

This SI API definition further employs the URL concept that is well known in connection with Internet and browser applications. A formal URL definition for DTV is still under discussion. The current API definition supports the DAVIC DVB URL and the General Instrument Corporation (GI) proposed DTV and ATSC URLs.

A television set-top terminal in accordance with the invention includes a computer readable medium (e.g., such as a magnetic or optical storage device) having computer program code means (e.g., object-oriented code such as Java(tm)), and means for executing (e.g., any processor such as a CPU) the computer program code means to implement an Application Programming Interface (API).

The API is adapted to abstract SI in a digital television transport stream that is received by the terminal in any one of a plurality of different formats. The API provides the abstracted SI in a

generic format that is suitable for use by an application at the terminal regardless of the specific format in which the SI is provided. For example, the different SI formats may include different data table  
5 formats.

This allows a terminal to be compatible with a number of different data stream formats.

Moreover, the API may provide a number of functions at the terminal that are responsive to the  
10 abstracted SI, such as a navigation function that allows the terminal to navigate among television channels in the transport stream, a program guide function that implements an electronic program guide for the television channels, a selection function that  
15 selects specific television channels, and a descriptor retrieval function for recovering descriptors of the SI.

Additionally, the API provides a utility function containing supporting objects, including events and  
20 exceptions, for supporting the delivery of the SI to the application synchronously, a data function for implementing a guide to data services in the transport stream in accordance with the abstracted SI, and a pipeline function for providing information regarding a  
25 physical delivery mechanism (e.g., satellite or transponder identifier) of the transport stream. The pipeline function uses the appropriate SI tables to provide information about the delivery network (MPEG-2 Transport Stream, etc.).

30 The API provides these functions by exposing the appropriate SI data to the application. An application

such as an EPG can use these APIs to do its job, e.g. an EPG uses the Navigation package (or function) to learn about channels, and it uses the Guide package (function) to learn about scheduled programs on the selected channels. Thus, the APIs or packages discussed herein are used (called) by specific applications.

The different available SI formats can include: Motion Picture Experts Group (MPEG) Program Specific Information (PSI), Digital Video Broadcasting (DVB) System Information (SI), Advanced Television Systems Committee (ATSC) Program and System Information Protocol (PSIP), Cable SI Digital Video Standard 234 of the Society of Cable and Television Engineers, and private SI.

The terminal may include a memory for storing the SI as the transport stream is received at the terminal, where the API provides a retrieve function call for enabling a calling application to retrieve the SI such that SI that is available in the memory is returned essentially immediately as a direct return value. If the service information is not available in the memory, the retrieve function call returns an exception signaling to the calling application that the SI is to be delivered to the calling application asynchronously. In this case, the API may also provides a utility function containing supporting objects, including events and exceptions, for supporting the asynchronous delivery of the SI to the calling application.

Moreover, when the transport stream is provided in one of a plurality of available transport stream

formats, the API may abstract the SI to provide it in a generic format that is suitable for use by an application at the terminal. This may be achieved by providing a base package having information that is  
5 generic to the available transport stream formats. The API is adapted for use with a separate package having information that is specific to the format of the received transport stream.

Generally, the API provides the base set of APIs,  
10 which is extensible. For instance, ATSC is adding new packages to provide PSIP specific info, and DVB may do the same. Such packages are not shown here. However, the API of the present invention is extensible so that format-specific extensions can be easily made by  
15 subclassing or extending the Abstract SI API classes and interfaces.

In a further aspect of the invention, the API provides incremental retrieval of the service information by allowing a calling application at the  
20 terminal to obtain a subset of the SI that is available at the terminal, perform an analysis of the obtained SI, and retrieve additional SI if required based on the analysis. The additional SI may be retrieved from the subset of the SI that is available at the terminal in a  
25 memory of the terminal, or from the transport stream.

Note that the SI data may be stored at the terminal using a variety of implementations. For example, it can be stored before and/or after abstracting, after optimizing and compression, and so  
30 forth.

The API enables a calling application at the terminal to recover a subset of the SI in the transport stream while rejecting other SI in the transport stream that is not required by the calling application.

5           The API may also provide a filtering function that is responsive to the abstracted SI to allow the application to specify at least one service in the transport stream in which the application is interested. The filtering can be based on whether the  
10       services are associated with: a particular transport stream (when services from multiple transport streams are available - a receiver may have multiple tuners, or SI data may be stored in the receiver's memory, in a SI database, that is collected from multiple transport  
15       streams over time), a network, a bouquet, a satellite, a satellite transponder, a service name, a service/channel number, a favorite channel, and a theme.

          Moreover, the API may be implemented using a  
20       plurality of packages for abstracting the SI, in which case it is efficient for the different applications at the terminal to include only specific ones of the packages according to specific portions of the abstracted SI that each application requires.

25           A corresponding method is also presented.

**BRIEF DESCRIPTION OF THE DRAWINGS**

FIG. 1 shows package relationships and dependencies of an API in accordance with the present invention.

5        FIG. 2 illustrates a navigation package class/interface diagram in accordance with the present invention.

      FIG. 3 illustrates a program guide package class/interface diagram in accordance with the present  
10        invention.

      FIG. 4 illustrates a selection package class/interface diagram in accordance with the present invention.

      FIG. 5 illustrates a descriptor package class/interface diagram in accordance with the present  
15        invention.

      FIG. 6 illustrates a pipeline package class/interface diagram in accordance with the present invention.

20        FIG. 7 illustrates a data package class/interface diagram in accordance with the present invention.

      FIG. 8 illustrates a utility package class/interface diagram in accordance with the present invention.

## DETAILED DESCRIPTION OF THE INVENTION

An API allows applications that are running on a digital television terminal to recover SI from a digital TS without regard to the specific format type.  
5 The API abstracts the relevant portions of the SI to provide it in a format that is usable by different applications at the terminal.

The API is preferably independent of an operating system and hardware of the terminal.

10 Note that the figures were generated automatically from Rational Rose(tm) CASE tool, developed by Rational Software Corporation, USA. The figures use the Rational Rose (tm) depiction of the UML, which is a language for specifying, constructing, visualizing, and  
15 documenting the artifacts of a software-intensive system. A class diagram represents the static structure of a system, and shows a pattern of behaviors that the system exhibits. This is accomplished by showing the existence of classes and their  
20 relationships. Each class is represented by a box with three sections. The top section lists the class name. The middle section denotes a list of attributes, and the bottom section denotes a list of operations.

25 A solid or dashed line between classes denotes an association or dependency. A white diamond tip denotes aggregation by reference, while a black diamond tip denotes aggregation by value. A triangular arrowhead denotes a restricted navigation, e.g., inheritance of operation but not of structure.



Moreover, interfaces and classes begin with an uppercase letter, while methods begin with a lowercase letter.

5 A class is a template that defines a data structure, method and function calls for an object. An interface defines a set of methods/function calls that can be manipulated by a class. The class provides the code for implementing an interface.

#### 1. Model Description

10 The entire SI database model is based on the concept of "views". There are different ways to look at the SI database, and different applications may have different needs. The specified views allow applications to be concerned only with a subset of the SI database based on the application's needs. The  
15 concept of views is represented by Java packages.

The following sections describe the object model of the Abstract SI API.

20 FIG. 1 is a high-level figure that shows package relationships and dependencies of an API in accordance with the present invention.

The Navigation package 110 contains the main set of classes and interfaces that are used to navigate the existing television channels (DVB Services or ATSC  
25 Virtual Channels). The Selection package 130 adds features which allow a TvChannel to be used for tuning and selection of specific services (MPEG programs). The Guide package 120 provides information useful for an EPG, including program schedules, individual program  
30 events and program ratings. The Descriptor package 140

allows a retrieval of individual MPEG descriptors associated with the MPEG sections that deliver the SI. The Pipeline package 170 isolates some of the specific delivery media information. The classes provided in this package currently represent the MPEG-2 delivery mechanism. The Data package 160 is similar to the Guide package 120 except it provides information about data-related events (services), e.g., any software application that is sent along with the audio/video stream, such as a stock ticker, news ticker, sports statistics, interactive commercial, etc.), not audio/video events. Lastly, the Util (Utility) package 150 contains objects of a supporting nature, such as events, exceptions, etc.

This model provides both a high-level abstraction of the SI that describe the layout of the content delivered over the multiplex (meta-data), as well as detailed information specific to a particular SI format. This is done via access to MPEG table descriptors. Since descriptors are used as way to extend the SI for additional and future functionality, it is a significant advantage of the invention that the API provides a generic access to the descriptors without changing the implementation of the API with every new or changed descriptor.

In one aspect of the invention, asynchronous delivery of results is provided. Since there are DTV receivers with varying capabilities, it is expected that not every receiver will cache all the SI data in the memory. It will do so for the necessary subset of the most useful information, but will have to parse the

actual TS when it needs to retrieve data not stored in memory. However, access to the TS may take a significant amount of time. Therefore the API provides an asynchronous access to information that is not  
5 expected to be in memory at all times. In general, asynchronous (or non-blocking) calls add complexity not only to the implementation of the API but to the application using the API as well.

To hide the difference between low-end and high-  
10 end receivers, this API provides a single method which can be completed synchronously, if the information is available locally (in memory), or asynchronously, if the data have to be retrieved from the TS. All API calls starting with "retrieve" either return the  
15 requested object or throw an exception indicating that the data will be delivered later via an asynchronous event. The caller can register itself as an listener to this event. Or, by not registering, the caller can indicate that it is interested in synchronous data  
20 delivery only. The exception includes enough information to cancel the request and to associate it with the actual event delivering the data.

The SI usually contains system time related information in the form of the PSIP STT message or DVB  
25 TDT and TOT messages. At this time it is assumed that the local DTV receiver time will be synchronized with the system time of the channel currently tuned to and the value can be obtained using the java.util.Date class. Note that this is acceptable if all transport  
30 multiplexes use a reliable and synchronized data source (such as GPS). If a certain multiplex provides

erroneous time information, it is up to the receiver implementation to resolve the situation.

### 1.1 Navigation View

FIG. 2 illustrates a navigation package class/interface diagram in accordance with the present invention.

Like-numbered elements correspond to one another in the figures.

The Navigation package 110 has two main functions, namely:

(1) give access to all or a selected subset of TvChannels, which represent DVB services and ATSC virtual channels; and

(2) give access to network related information such as the network definition, satellite and transponder information, TS and bouquet information, etc.

Like-numbered elements correspond to one another in the figures.

The package includes the following classes and interfaces: CAIdentification 205, DeliverySystemType 807, SystemInformationType 810, ChannelCollection 220, TvChannel 225, SIUpdate 830, ChannelConstraint 235, SIManager 240, TvChannelDetails 245, and ChannelIdentification 250.

The main navigation function is represented by the following classes and interfaces. The SIManager 240 is the primary access point to the underlying SI database. It can generate a collection of TvChannels 225 called ChannelCollection 220 based on the selection criteria

represented by the ChannelConstraint 235 object. The selection criterion may be a network ID, TS ID, bouquet ID, user favorite channels, URL, etc. The collection can then be used to sort either by channel numbers or  
5 by channel names and navigate through the TvChannels 225 which represent either a DVB Service or an ATSC Virtual Channel.

The TvChannel 225 itself contains only the minimal information (such as Locator, Channel name and number)  
10 needed to navigate. Additional information about the channel is contained in the TvChannelDetails object 245. The TvChannelDetails also provides some CA-related information via the CAIdentification interface 205, a delivery mechanism, and the time when the  
15 information about this channel was last updated. The channel name and number is actually encapsulated in the ChannelIdentification object 250, which can be extended to accommodate different mechanisms for naming and  
numbering channels, such as the ATSC two-part channel  
20 number (e.g., using a major.minor notation - a string with a dot between the major and minor channel numbers - ex: 10.2).

## 1.2 Guide View

FIG. 3 illustrates a program guide package  
25 class/interface diagram in accordance with the present invention.

The package includes the following interfaces:  
SIManager 240, TvChannelDetails 245,  
TvChannelWithSchedule 300, ContentRatingAdvisory 310,  
30 ProgramSchedule 320, RatingRegion 330, ProgramEvent

340, RatingDimension 350 and SIUpdate 830 (defined in FIG. 8).

This package is intended to support electronic program guide type applications. It provides the application with two related sets of information: the program schedule on each channel, and rating information. The ProgramSchedule object 320 can be used to retrieve the currently-playing program, the immediately following one, and then any other available program in the future for a specified time period. Each ProgramEvent 340 can be queried for its name, start time and end time, description, rating, cost and other related information.

Rating related information is organized into rating regions, where each region may have a multiple rating dimensions such as MPAA rating, FCC TV rating, DVB age-based rating, etc. Each dimension contains multiple levels; each ProgramEvent is labeled with one of these levels for all supported rating regions.

### 1.3 Selection View

FIG. 4 illustrates a selection/tuning package class/interface diagram in accordance with the present invention.

The package includes the following classes and interfaces: TvChannelDetails 245, ChannelComponent 410, MPEGChannelComponent 420, Locator 430, MPEGLocator 440 and ATSCLocator 450.

The tuning package extends the navigation functionality primarily by adding information about individual components of each TvChannel, such as video,

possibly multiple audio components and optional data components. The TvChannel object 225 can provide a Locator used by a TV Player which follows the JMF Player model or a separate service selection API.

5           The generic ChannelComponent 410 is extended in by the MPEGChannelComponent 420, which represents MPEG-specific information.

          The basic Locator 430 concept is extended to support the MPEG-specific Locator (MPEGLocator 440),  
10           which is then specialized for ATSC (ATSCLocator 450). Note that the DAVIC package includes a DVB-specific subclass as well.

#### 1.4 Descriptor View

          FIG. 5 illustrates a descriptor package  
15           class/interface diagram in accordance with the present invention.

          The package includes the following interfaces:  
TableType 510, DescriptorTag 520, Descriptor 530,  
MPEGTableDescriptors 540 and MPEGPipeline 660 (defined  
20           in FIG. 6).

          Descriptors are generally delivered in MPEG-2 tables in two locations: the outer loop which associates descriptors with the entire table, and the inner loop which associates descriptors with the  
25           specific entity described in the inner loop. An example is a PSIP VCT, which has both outer- and inner-loop descriptors. The outer loop descriptors are associated with all virtual channels defined by this VCT, while each inner loop contains descriptors for a  
30           specific virtual channel.

Applications executing on a set-top will use APIs to access the set-top functions including the SI. The goal is to provide a format-independent API to retrieve SI (ATSC PSIP, DVB SI, etc.) to minimize the

5 application's required knowledge of the details of these SI formats. Abstraction is good in most cases, but certain applications need access to a specific descriptor which is not provided at the abstract API level. For example, this can be a descriptor which  
10 will be defined in the future. Therefore, it cannot be represented in the API directly. It can also be one of the descriptors that are not intended for an application; they are rather used by the receiver itself (e.g., AC3 descriptor, Linkage descriptor, etc.)

15 The problem is to specify the specific descriptors an application is interested in. This applies to both determining the appropriate table, as well as the position of the descriptor loop.

The type of information (e.g., TS, service, event,  
20 etc.) for which descriptors are to be retrieved is primarily identified by a DTV URL. There are some rare exceptions; e.g., the DVB BAT is really not identified by any current URL formats. The DTV URL is usually sufficient to point to a specific <table\_type,  
25 descriptor loop> pair, especially for URLs pointing to an event or an elementary stream.

There are several cases where the URL is not specific enough because an entity, a service for instance, may be described in multiple tables, such as  
30 PMT and DVB SDT. Therefore, a table\_type is specified to identify which type of a table to retrieve



descriptors from. Table\_id is not used since some table types have different table\_ids within the type (e.g., DVB NIT has 0x40 and 0x41). The table\_type scopes down the range of tables to search for descriptor especially at the higher level of URLs (the service and TS levels).

In some rare cases, an additional identification is needed. For instance, if a rating\_type is specified, a Rating Region ID is needed to retrieve the proper subset of descriptors from the ATSC RRT. The same applies to navigation\_type tables where a Bouquet ID is needed to retrieve descriptors from the DVB BAT outer descriptor loop.

Additionally an optional set of descriptor tags can be specified in the call to limit the search and the returned set of descriptors to the descriptors hinted in the list. If a set of descriptors is found in the given table identified by the <url, table\_type, entity\_info> tuple (e.g., set of values), only those matching the descriptor tags provided in the hint will be returned.

Note that all descriptor retrieval methods support both synchronous as well as asynchronous data delivery depending on the caching capability of the DTV receiver.

### 1.5 Pipeline View

In an optional embodiment, separation of MPEG-2 specific data is provided.

Digital television content is primarily delivered using the MPEG-2 transport format. This is true for

DVB as well as ATSC. With the convergence of television and personal computers, it is expected that digital video content may be delivered to the television receiver by other means, such as over the Internet in an IP format with some kind of a real-time protocol. This motivates a higher level of abstraction for the SI API that hides not only the difference between ATSC PSIP and DVB SI (both extensions of MPEG-2), but also the difference between the different ways of delivering the content and the SI.

This design removes all MPEG-2 (e.g., TS) specific information into a separate package. A base class, which provides generic transport-neutral information, can be further extended with MPEG-2 specific information for MPEG-2 delivery networks. As new delivery mechanisms become popular, the base classes can be extended to provide detailed information about the specific protocol.

Essentially, the API further abstracts the SI to provide it in a manner that is independent of the specific TS formats. The API can therefore run on a terminal that receives a TS in any one of a number of different available formats.

FIG. 6 illustrates a pipeline package class/interface diagram in accordance with the present invention.

The package includes the following classes and interfaces: SIManager 240, SatelliteInformation 605, NetworkInformation 610, BouquetInformation 630, SISpecificManager 640, PipelineInformation 650,

TransportStreamInfo 660, MPEGPipeline 670 and  
SystemInformationType 810 (defined in FIG. 8).

5       The Pipeline package provides additional  
information about the physical mechanism media  
delivering the content the SI data describes. The  
physical delivery mechanism can include, e.g.,  
satellite/transponder information. SISpecificManager  
640 provides access to the abstract PipelineInformation  
650, which in this particular case is extended by the  
10       MPEGPipeline 670 representing an MPEG-2 multiplex. The  
generic PipelineInformation 650 can be extended to  
support other types of delivery of content (e.g.,  
Internet Protocols).

#### 1.6 Data View

15       FIG. 7 illustrates a data package class/interface  
diagram in accordance with the present invention.

      The package includes the following interfaces:  
TvChannelDetails 245, ContentRatingAdvisory 310,  
TvChannelWithData 710, DataSchedule 720, DataEvent 730  
20       and SIUpdate 830 (defined in FIG. 8)

      The Data view is similar to the Guide view, which  
represents EPG-like information. In this case, the  
data schedule represents a lineup or guide of data  
events as opposed to audio/video events.

25       Note that this package is modeled after the ATSC  
T3/S13 work, which is still in progress.

#### 1.7 Utility View

FIG. 8 illustrates a utility package class/interface diagram in accordance with the present invention.

The package includes the following classes and  
5 interfaces: SIFactory 805, SIManager 240,  
SystemInformationType 810, SIChangeListener 815,  
EventObject 820, SIUpdate 830, SIChangeEvent 832,  
SIChangeEvent 834, TvChannelChangeEvent 835,  
DataChangeEvent 840, ProgramChangeEvent 845,  
10 SIInfoChangeEvent 850, Exception 860 (from the  
java.lang package), SIRetrievalEvent 865,  
SIRetrievalListener 870, SIDelayedDeliveryException  
875, SIException 880, SIRetrievalFailEvent 882,  
SIRetrievalSuccessEvent 884, SIRequest 886,  
15 SINotAvailableException 890,  
SIRetrievalSingleSuccessEvent 892 and  
SIRetrievalMultipleSuccessEvent 894.

The utility package provides support in several areas, namely:

- 20 1. the event notification mechanism for both SI  
entity changes detected in the TS and events delivering  
asynchronous requests;  
2. the SI Factory which creates SI Manager(s); and  
3. exceptions.

25 The SIChangeListener 815 and the SIChangeEvent 834  
support the standard Java event model. There are three  
types of objects to listen to for changes:

- 30 1. The SIManager 240, which reports changes  
detected in the Network definition related tables  
represented by the TransportStreamInfo 660,

NetworkInformation 610, BouquetInformation 630, etc. objects.

2. The ChannelCollection 220, which reports changes detected in any one of the TvChannels 225  
5 contained by the collection.

3. The ProgramSchedule 320, which reports changes detected in any one of the ProgramEvents 340 in the schedule.

Applications can register as listeners with the  
10 above-listed objects, and they will be notified by receiving one of the three appropriate events, which will deliver the details about which specific object has changed. To obtain the new information, the application needs to regenerate the particular  
15 collection of objects (ChannelCollection 220, ProgramSchedule 320, etc.).

Note that it may be difficult to implement the above defined events unless the receiver does a field-by-field comparison of old and new tables of the same  
20 type. The receiver may choose to deliver only the high-level event and let the application update multiple objects if necessary.

The Utility package 150 also provides the mechanism to deliver data asynchronously. This  
25 functionality is provided by the SIRequest 886, SIDelayedDeliveryException 875, SIRetrievalEvent 865 and SIRetrievalListener 870. The SIDelayedDeliveryException 875 signals to the caller that the data is available only asynchronously and  
30 provides the SIRequest object 886 which can be used to cancel the request and to associate this request with

the SI RetrievalEvent 865, which eventually delivers the requested data or an indication of a failure. The caller of the asynchronous method (indicated by the "retrieveXXX" name) may register as a listener to get the event. If it decides not to register as a listener, it is an indication to the API implementation that there is no need to parse the TS and retrieve the requested data. Thus, in accordance with the present invention, the application has complete control over the delivery of data.

Thus, incremental retrieval of SI data can be provided. Generally, there is a wide variety of applications that will execute on DTV receivers. Some of the receivers need access to the full SI data set (such as EPG-like applications), while others may need only a very small subset of the SI data. To support all of these applications without putting an extra burden on those needing a small subset of the SI data, the present invention enables incremental retrieval of SI data. This allows an application to obtain a small set of SI data, make an intelligent decision, and retrieve more SI for possibly a selected SI object or a subset of SI objects.

Such a design provides flexibility, more control to the application, and more efficient retrieval of SI data.

Since most of the SI objects are really interfaces which don't have constructors, an application does not have a way to instantiate an object that implements the specified interface. To get an instance of the object that implements the SIManager interface 240, an

SIFactory class 805 is provided which has a method to obtain an instance of the SIManager.

Several methods throw Exceptions to report invalid parameters or other types of error conditions (see  
5 classes 875 and 880).

## 2.0 Class and Interface Description

### 2.1 Navigation Package (FIG. 2)

This view at the SI is from the point of view of a navigation mechanism, such as a simple channel guide,  
10 channelUp and channelDown buttons, etc.

It provides enough information to present a list of available MPEG2 services with a filtering mechanism.

#### 2.1.1 TvChannel 225

TvChannel represents an abstract view on what is  
15 referred to as an MPEG Program, DVB Service or an ATSC Virtual Channel. It represents the common information associated with it, such as channel name, channel number, description, etc. Each TvChannel is uniquely identified by a tuple including system type, network  
20 id, TS ID, service number or channel number. This identification may be represented in the URL format.

Public Operations:

**getLocator () : Locator**

Returns the complete Locator of this TvChannel.

25 **getLongChannelName () : String**

Returns a full channel name.

**isHidden () : boolean**

Returns TRUE if this is a hidden channel.

```
        retrieveDetails (listener :  
org.atsc.abstractSI.util.SIRetrievalListener) :  
org.atsc.abstractSI.navigation.TvChannelDetails
```

5 This method retrieves additional information about  
the TvChannel. This information is based on the SI  
data (also called meta-data). SI data can be  
considered to be information about other data (content)  
such as audio/video/data components of the transport  
stream. Since it is data about other data, it is  
10 sometimes called meta-data.

This method may return data synchronously or  
asynchronously.

```
        getIdentification () :  
org.atsc.abstractSI.navigation.ChannelIdentification
```

15 This method is used to obtain the channel  
identification (e.g., channel name and number).

#### 2.1.2 ChannelCollection 220

ChannelCollection represents a collection of  
TVChannels 225 based on a specific grouping rule  
20 defined by the ChannelConstraint association class 235.  
Filtering used to create such a collection may be based  
on TS ID, Network ID, System Type (DVB, ATSC, etc.),  
Bouquet, content theme (e.g., sports), Channel name or  
a subset of it (e.g., CNN) or possibly a combination of  
25 these.

This class also provides a mechanism for browsing  
those TVChannels contained by the particular collection  
instance.

30 This is similar to the SortedMap interface (from  
Sun Microsystem's JDK 1.2 APIs) but provides only a



small subset of the functionality as applicable to this domain.

Public Attributes:

**`SORT_BY_CHANNEL_NUMBER : short = 1`**

5       **`SORT_BY_NAME : short = 2`**

Public Operations:

**`size () : int`**

Returns the number of TvChannels contained in this collection.

10       **`sort (criterion : short) : void`**

Called to specify an algorithm for determining the behavior of the nextChannel and previousChannel methods.

For example, if sorting by channel name is specified, the nextChannel method will return the next TvChannel object with a name alphabetically following the current TvChannel. It is always sorted in an ascending order.

15       **`nextChannel (currentChannel :  
20       org.atsc.abstractSI.navigation.TvChannel) : TvChannel`**

Returns the next TvChannel relative to the specified TvChannel based on the sorting criterion. Null is returned if end of collection is reached.

25       **`previousChannel (currentChannel :  
25       org.atsc.abstractSI.navigation.TvChannel) : TvChannel`**

Returns the previous TvChannel based on the sorting criterion. Null is returned if the beginning of this collection is reached.

30       **`firstChannel () : TvChannel`**

Returns the first TvChannel in this collection based on the sorting criterion set for this collection.

**lastChannel () : TvChannel**

Returns the last TvChannel in this collection based on the sorting criterion set for this collection.

**addListener (listener : SIChangeListener) : void**

5       Called to register an SIChangeListener 815 for changes related to the Channels in this collection. A TvChannelChangeEvent 835 will be delivered to the listener.

**removeListener (listener : SIChangeListener) :**

10   **void**

Called to deregister a SIChangeListener for changes related to the Channels in this collection.

**retrieveChannels (filter :**

**org.atsc.abstractSI.navigation.ChannelConstraint,**

15   **listener :**

**org.atsc.abstractSI.util.SIRetrievalListener) :**

**ChannelCollection**

20       This method returns a ChannelCollection object 220, which is a subset of this collection, based on the grouping conditions specified in the filter parameter. If the filter is null, a collection of all TvChannels 225 contained in this collection is returned.

25       This method is provided to generate an increasingly specialized collections of TvChannels based on multiple filtering (grouping) criteria.

**findChannel (locator : org.davic.net.Locator) :**

**org.atsc.abstractSI.navigation.TvChannel**

30       This method returns the TvChannel corresponding to the specified locator if it is a member of this collection. Otherwise, it returns null.

```
        findChannel (channelID :  
org.atsc.abstractSI.navigation.ChannelIdentification) :  
org.atsc.abstractSI.navigation.TvChannel
```

5        This method returns the TvChannel corresponding to  
the specified channel identification if it is a member  
of this collection. Otherwise, it returns null.

#### 2.1.3        SIManager 240

SI Manager represents the central managing entity  
which has a knowledge of the entire network or a  
10       collection of networks, and can create a collection of  
TvChannels based on the ChannelConstraint filtering  
rules.

It has also access to specific SI representations  
of each individual TS (DVB SIDatabase, ATSC  
15       PSIPDatabase, etc.)

Public Operations:

```
        retrieveChannels (filter :  
org.atsc.abstractSI.navigation.ChannelConstraint,  
listener :  
20       org.atsc.abstractSI.util.SIRetrievalListener) :  
ChannelCollection
```

This method returns a ChannelCollection object  
based on the grouping conditions specified in the  
filter parameter. If the filter is null, a collection  
25       of all known TvChannels is generated.

This method can deliver results both synchronously  
or asynchronously. If requested data is available  
immediately, it is returned synchronously.

If the data must be retrieved from the transport  
30       first, the SIDelayedDeliveryException 875 is thrown and

the results are delivered to the registered listener via an event.

Parameter filter - A rule constraining the requested channel collection.

5       Parameter listener - A listener which receives the delivery event when data are retrieved asynchronously. If an application does not provide a listener (null), no asynchronous retrieval is attempted. The listener is registered for this one  
10       call only.

**setPreferredLanguage (language : int) : void**

This method sets the language used to return any textual information from the SI related classes and interfaces (e.g., TvChannel name, etc.) if provided as  
15       a multilingual string in multiple languages. If the specified language is not available, the system-level preferred language is used. If that language is not available either, the first available language will be used.

20       This method is used to temporarily override the system-level preferred language within the abstractSI package.

**getPreferredLanguage () : int**

This method is called to determine the preferred  
25       language for returning string-type values.

**getRatingRegions () : int[]**

This method returns a list of available Rating Region IDs.

**retrieveRatingRegion (regionID : int, listener :  
30       org.atsc.abstractSI.util.SIRetrievalListener) :  
RatingRegion**

This method is used to obtain a RatingRegion object of the specified ratingRegionID. This method may deliver data synchronously as well as asynchronously.

#### 5           2.1.4       ChannelConstraint 235

This association class represents a set of rules or filtering criteria used to generate a particular ChannelCollection 220. Filtering used to create such a collection may be based on TS ID, Network ID, System Type (DVB, ATSC, etc.), Bouquet, content theme (e.g., sports), Channel name or a subset of it (e.g., CNN), etc.

Public Operations:

15       **ChannelConstraint (filter : int, value : java.lang.Object) :**

This constructor specifies what the grouping criteria should be.

Parameter filter - Filter represents an enumerated value of a specific filter type.

20       Parameter value - Sets the filter value based on the filter type.

**getFilterType () : int**

Called to determine what grouping mechanism is used for this ChannelConstraint.

25       **getFilterValue () : java.lang.Object**

Called to determine the value of the current filter. The meaning of the value changes based on the filter type.

#### 2.1.5       CAIdentification 205

The CAIdentification interface provides a mechanism to associate CA-related information with any SI-related class, such as a TS or a TvChannel. It accesses information found in the CAT MPEG table.

5       Public Operations:

**getCASystemIDs () : int[]**

      Returns an array of CA System IDs as defined in the CAT MPEG message. Returns null if no CAT information is provided for this channel.

10       **isAccessControlled () : boolean**

      Returns TRUE if this TvChannel is protected by CA. Returns FALSE if it is not protected or unknown.

#### 2.1.6       FilterType 265

15       This interface provides a definition of constant values of supported filtering mechanisms, such as filtering by Network ID, TS ID, etc.

      Public Attributes:

**NETWORK\_ID\_FILTER : short = 1**

      Filter based on Network ID

20       **TRANSPORT\_ID\_FILTER : short = 2**

      Filter based on TS ID

**BOUQUET\_ID\_FILTER : short = 3**

      Filter based on Bouquet ID

**SYSTEM\_TYPE\_FILTER : short = 4**

25       Filter based on SI type (e.g., DVB, ATSC, etc.)

**SATELLITE\_FILTER : short = 5**

      Filter based on Satellite ID

**TRANSPONDER\_FILTER : short = 6**

      Filter based on Transponder Number

30       **LOCATOR\_FILTER : short = 7**

Filter based on a Locator (URL)

**CHANNEL\_NAME\_FILTER : short = 8**

Filter based on channel names

**CHANNEL\_NUMBER\_FILTER : short = 9**

5 Filter based on channel numbers

**THEME\_FILTER : short = 10**

Filter based on themes/content categories

**FAVORITE\_CHANNELS\_FILTER : short = 11**

Filter based on user favorite channels

10 2.1.7 TvChannelDetails 245

This interface provides access to TvChannel meta-data.

Derived from DeliverySystemType 807, SIUpdate 830, SystemInformationType 810, and CAIdentification 205.

15 Public Operations:

**retrieveChannelDescription (listener :  
org.atsc.abstractSI.util.SIRetrievalListener) : String**

Returns a textual description of this channel or null if none available.

20 **getServiceProvider () : String**

Returns the name of the service provider.

**getServiceType () : int**

Returns the type of this service. Service type is one of the following values: digital TV, digital radio, analog TV, analog radio, data service, NVOD reference service, NVOD time shifted service. This list may be extended with new types of services in the future.

25 **retrieveComponents (listener :  
org.atsc.abstractSI.util.SIRetrievalListener) :  
30 ChannelComponent[]**

This method returns a list of elementary components which are part of this channel.

**getRunningStatus () : short**

5 Returns the running status of this service (see DVB SI documentation).

**retrieveContentAdvisory (listener :  
org.atsc.abstractSI.util.SIRetrievalListener) :  
org.atsc.abstractSI.guide.ContentRatingAdvisory[]**

10 Returns a list of Content Advisory information for each Rating Region.

**getDeliverySystemType () : int**

Called to determine the mechanism of delivering this TvChannel (e.g., cable, satellite, etc).

#### 2.1.8 ChannelIdentification 250

15 This interface is used to provide a flexible and extensible way of identifying TvChannels by names, channel numbers, or other means.

It can be extended to support specific mechanisms such as the ATSC two-part channel numbers.

20 Public Operations:

**getChannelNumber () : String**

25 Returns a channel number, which is a system-specific value. For example, DCII uses a single number, DVB does not really support channel numbers or they are set-top or broadcaster specific, and ATSC now has the two-part channel number.

In the ATSC domain, it is in the major.minor notation (a string with a dot between the major and minor channel numbers).



For DVB channels, it can be the service ID as the channel number.

It can also represent a broadcaster-specific channel numbering mechanism delivered as a private descriptor.

**getChannelName () : String**

Returns a short channel name or an acronym.

## 2.2 Guide Package (FIG. 3)

This view of the SI is from the point of view of a program guide which shows not only the service availability but a list of future events offered on each of them.

### 2.2.1 ProgramSchedule 320

This interface represents a collection of program events for a given TvChannel 225 ordered by time. It provides the current, next and future events.

Public Operations:

**retrievePresentEvent (listener :  
org.atsc.abstractSI.util.SIRetrievalListener) :  
ProgramEvent**

Returns the current (can be viewed if tuned to) program event.

**retrieveFollowingEvent (listener :  
org.atsc.abstractSI.util.SIRetrievalListener) :  
ProgramEvent**

Returns the program event which immediately follows the current program event.

**retrieveFutureEvent (when : java.util.Date,  
listener :**

**org.atsc.abstractSI.util.SIRetrievalListener) :**  
**ProgramEvent**

Returns the program event for the specified time.  
The program event which contains the specified time  
5 will be returned. The specified time falls between the  
program event's start time and the start time plus the  
event's duration.

Null is returned when the specified time does not  
fall inside any known program event.

10 **retrieveFutureEvents (startOfInterval :**  
**java.util.Date, endOfInterval : java.util.Date,**  
**listener :**  
**org.atsc.abstractSI.util.SIRetrievalListener) :**  
**ProgramEvent[]**

15 Returns all known program events on this channel  
for the specified time interval.

**retrieveEvent (locator : org.davic.net.Locator,**  
**listener :**  
**org.atsc.abstractSI.util.SIRetrievalListener) :**  
20 **org.atsc.abstractSI.guide.ProgramEvent**

This method retrieves a program event matching the  
locator. Note that the event must be part of this  
schedule.

**addListener (listener :**  
25 **org.atsc.abstractSI.util.SIChangeListener) : void**

Called to register an SIChangeListener 815 for  
events related to changes of the ProgramEvents 340 on  
this schedule. The ProgramChangeEvent 845 is delivered  
to the specified listener when any ProgramEvent on this  
30 schedule changes.

```
removeListener (listener : SIChangeListener) :  
void
```

Called to deregister a SIChangeListener 815.

### 2.2.2 ProgramEvent 340

5 This interface comprises a collection of elementary streams with a common time base, an associated start time, and an associated end time. An event is equivalent to the common industry usage of "TV program."

10 The Event Information Table (EIT) contains information (titles, start times, etc.) for events on defined TvChannels. An event is, in most cases, a typical TV program, however its definition may be extended to include particular data broadcasting  
15 sessions and other information segments, such as an infomercial, or to show that part of the event includes an interactive data application and the other part does not.

Derived from SystemInformationType 810 and  
20 SIUpdate 830. SIUpdate is an interface which is shared by all SI objects which represent SI tables and it provides information about the last time this object was updated.

Public Operations:

25 **getLocator () : Locator**

Returns a Locator representing this program event.

**getStartTime () : java.util.Date**

Returns the start time of this program event.

**getEndTime () : java.util.Date**

30 Returns the end time of this program event.

```
    getDuration () : long
        Returns the duration of this program event in
seconds.
    getEventName () : String
5       Returns the program event title.
    retrieveDescription (listener :
org.atsc.abstractSI.util.SIRetrievalListener) : String
        Returns a textual description of the event. This
information comes from the Extended Text Table (ETT) in
10    ATSC or an Extended Event Descriptor in DVB. An empty
string will be returned when no ETT is available for
this event.
    retrieveContentAdvisory (listener :
org.atsc.abstractSI.util.SIRetrievalListener) :
15    ContentRatingAdvisory[]
        Returns a list of Content Advisory information for
each Rating Region.
    getRunningStatus () : short
        Returns the running status of this event (see DVB
20    SI documentation).
    getTvChannel () : TvChannel
        Returns the TvChannel this program event is
associated with. In DVB, events and TvChannels are
associated via the service ID; in ATSC, they are
25    associated via the source ID.
    getCost () : String
        This method returns the cost of an IPPV Program
Event or null if this is not an IPPV event.
    getTheme () : short[]
30    This method returns a list of themes associated
with the program. It is represented as a number and is
```

system-specific (e.g., DVB content nibble). Refer to the appropriate specification for details.

### 2.2.3 ContentRatingAdvisory 310

5 The Content Advisory is used to indicate, for a given event, ratings for any or all of the rating dimensions defined for each rating region. Ratings may be given for any or all of the defined regions. An Event without content advisory indicates that the rating value for any rating dimension defined in any rating region is zero. The absence of ratings for a specific dimension is completely equivalent to having a zero-valued rating for such a dimension. The absence of ratings for a specific region implies the absence of ratings for all the dimensions in the region.

15 Public Operations:

**getRatingRegion () : short**

Returns a unsigned 8-bit integer that specifies the rating region for which the data in this object is defined. The rating\_region associates ratings data given here with data defined in a RRT tagged with the corresponding rating region.

Note that the DVB rating system is based on age only. It can be easily mapped to this more elaborate rating system as one of the dimensions.

25 **getDimensions () : short[]**

Returns a list of all dimensions rated for this Rating Region.

**getRatingValue (ratedDimension : short) : short**

Returns a number representing the rating value of the dimension specified by the parameter for this rating region.

**getRatingText (ratedDimension : short) : String**

5       Returns the rating description display string for the specified dimension. It shall be limited to 16 characters or less.

#### 2.2.4       RatingRegion 330

10       This interface defines all rating dimensions of a specific rating region.

PSIP Rating defines the TV parental guideline system referenced by any content advisory descriptor for a Service or Event. It is based on the RRT.

Public Operations:

15       **getNumberOfDimensions () : short**

Returns the number of rating dimensions defined in this Rating Region.

**getRegionName () : String**

20       Returns the rating region name, e.g., "U.S. (50 states + possessions)", associated with the Rating Region. The display string for the rating region name shall be limited to 32 characters or less.

**getRatingDimensions () : RatingDimension[]**

25       Returns an array of all Rating Dimensions defined for this Rating Region.

#### 2.2.5       RatingDimension 350

One dimension in the U.S. rating region, for example, is used to describe the MPAA list. The

dimension name for such a case may be defined as "MPAA".

Another example of a rating dimension may be a age-based DVB rating.

5       Public Operations:

**getDimensionName () : String**

Returns a string which represents the dimension name being described by this object, such as "MPAA". The dimension name display string shall be limited to 20 characters or less.

10

**isGraduatedScale () : boolean**

Indicates whether or not the rating values in this dimension represent a graduated scale, i.e., higher rating values represent increasing levels of rated content within the dimension. Value 1 means yes, while value 0 means no.

15

**getNumberOfLevels () : short**

Returns 4-bit field (1-15) specifying the number of values defined for this particular dimension.

20

**getRatingLevelDescription (ratingLevelIndex : short) : String[]**

Returns a pair of Strings describing the specified Rating Level for this Dimension.

The first string represents the abbreviated name for one particular rating value. The abbreviated name for rating value 0 shall be set to a null string, i.e., "". The abbreviated value display string shall be limited to 8 characters or less.

25

The second string represents the full name for one particular rating value. The full name for rating value 0 shall be set to a null string, i.e., "". The

30

rating value display string shall be limited to 150 characters or less.

#### 2.2.6 TvChannelWithSchedule 300

5 This interface extends the TvChannelDetails by adding access to the program schedule associated with this TvChannel. It is derived from TvChannelDetails 245.

Public Operations:

**getProgramSchedule () : ProgramSchedule**

10 Returns a schedule of programs/events associated with this TvChannel.

#### 2.3 Selection Package (FIG. 4)

15 This view at the SI is from the point of view of channel selection. It represents the information that is necessary to provide to other APIs, such as NetworkInterfaceController, JMF Player, A/V Decoder, etc., to select, tune and eventually decode a specific MPEG-2 service and its components.

#### 2.3.1 ChannelComponent 410

20 This interface represents an abstraction of an MPEG Elementary Stream. It provides information about individual components of the TvChannel 225. It may be used by a Player to select the appropriate components of the TS.

25 Public Operations:

**getComponentName () : String**

Returns a name associated with this component. The Component Descriptor may be used if present. A



generic name (e.g., video, first audio, etc.) may be used otherwise.

**getAssociatedLanguage () : int**

Returns 3-byte (24 bits) field, based on ISO 639.2/B, specifies the language used for the elementary stream. In case of no language specified for this elementary stream, e.g., video, each byte shall have the value 0x00.

**getStreamType () : short**

Returns the stream type of this component.  
See also StreamType

#### 2.3.2 MPEGLocator 440

Derived from Locator 430.

Public Operations:

**getNetworkID () : int**

Called to determine the Network ID of the network this Locator represents.

**getServiceID () : int**

Called to determine the Service ID (MPEG program number) of the service this Locator represents.

**getTransportStreamID () : int**

Called to determine the TransportStreamID of the transport this locator represents.

**getEventID () : int**

Returns an identification of this program event.

Note: ATSC PSIP Event ID is unique only within a single EIT table while the DVB Event ID is unique within the service.

#### 2.3.3 ATSCLocator 450

Derived from MPEGLocator 440.

Public Operations:

**getSourceID () : int**

5 Returns an integer number that identifies the  
programming source associated with the virtual channel.  
In this context, a source is one specific source of  
video, text, data, or audio programming.

Source ID value zero is reserved. Source ID  
values in the range 0x0001 to 0x0FFF shall be unique  
10 within the TS that carries the VCT, while values 0x1000  
to 0xFFFF shall be unique at the regional level.

Values for source\_ids 0x1000 and above shall be  
issued and administered by a Registration Authority  
designated by the ATSC.

15 2.3.4 MPEGChannelComponent 420

This is a specific Channel Component representing  
MPEG-2 elementary stream.

Derived from ChannelComponent 410.

Public Operations:

20 **getPID () : short**

Returns the PID the data of elementary stream is  
sent on in the TS.

**getPcrPID () : short**

25 Returns the PCR PID number associated with this  
component.

**getTag () : int**

Returns the component tag (Stream Identifier  
Descriptor) of this elementary stream, or null if none  
is present.

30 **getAssociationTag () : int**

Returns the association tag (Association Tag Descriptor) of this elementary stream, or null if none is present.

#### 2.3.5 TunableChannelControl (415)

5 TunableChannelControl is an interface which accepts a TvChannel object that can be tuned to and played by the JMF Player or its DTV derivative.

Derived from JMF javax.media.Control.

Public Operations:

10 **getCurrentChannel(): TvChannel**

Returns the currently-playing TvChannel.

**play(newChannel : TvChannel)**

This method is called to initiate a tuning, decoding and presentation of a TvChannel.

15 **play(newChannel : TvChannel, components : int[])**

This method is called to initiate a tuning, decoding and presentation of a TvChannel. The additional parameter specifies which components of the TvChannel to play. Components are identified by their tag number.

20 **play(newChannel : TvChannel, language : int)**

This method is called to initiate a tuning, decoding and presentation of a TvChannel. The additional parameter specifies which components of the TvChannel to play based on the language association.

25

#### 2.4 Descriptor Package (FIG. 5)

This package describes a general API mechanism of retrieving descriptors from any type of an MPEG table:

MPEG PSI, DVB SI, ATSC PSIP, or even private tables such as DCII.

The intention is to define an SI-format-independent mechanism of retrieving these descriptors to minimize the knowledge of DVB and ATSC differences and the need for special code in an application calling this API.

Refer to the discussion in section 1.4, "Descriptor View".

#### 10           2.4.1       MPEGTableDescriptors 540

This interface provides a mechanism for retrieving MPEG Descriptors associated with any MPEG, DVB, ATSC or even a private table. It either returns a set of descriptors or a set of available descriptor tags. The calling application may also hint which descriptors it is interested in. Only a subset of those will be returned if they exist in the specified table.

Descriptors are primarily identified by a URL. This is in many cases not enough because a service, for instance, may be described in multiple tables, such as PMT and SDT. Therefore, table type is specified to identify which type of a table to retrieve descriptors from. In some rare cases an additional identification is needed. For instance, if a RRT type is specified, a Rating Region ID is needed to retrieve the proper subset of descriptors. The same applies to BAT type tables, where a Bouquet ID is needed to determine which descriptors to retrieve.

Additionally, an optional set of descriptor tags can be specified in the call to limit the search and the returned set of descriptors.

Derived from DescriptorTag 520 and TableType 510.

5       Public Operations:

```
retrieveDescriptors (url : Locator, tableType :  
short, someTags : short[], listener :  
org.atsc.abstractSI.util.SIRetrievalListener) :  
org.atsc.abstractSI.descriptor.Descriptor[]
```

10       Retrieves a set of descriptors. This method retrieves all or a set of descriptors associated with the entity specified by the Locator (URL) delivered in the specified table in the order the descriptors are broadcast.

15       Parameter url - A URL-based specification of an entity (such as a TS, a service, etc.) for which to get the descriptors.

Parameter tableID - A TableType of the table from which to retrieve the specified descriptors.

20       Parameter someTags - A list of tags for descriptors (identified by their tags) the application is interested in. All non-applicable tag values are ignored. If this list is empty or null, all descriptors will be returned.

25       Parameter listener - A listener which receives the delivery event when data are retrieved asynchronously. If an application does not provide a listener (null), no asynchronous retrieval is attempted. The listener is registered for this one call only.

30       Return Value - A set (or subset) of Descriptor objects as indicated in someTags.

See also Descriptor.

**retrieveDescriptors** (url : Locator, tableType :  
short, entityID : short, someTags : short[], listener :  
org.atsc.abstractSI.util.SIRetrievalListener) :

5 **org.atsc.abstractSI.descriptor.Descriptor[]**

Retrieves a set of descriptors. This method  
retrieves all or a set of descriptors associated with  
the entity specified by the Locator (URL) delivered in  
the specified table in the order the descriptors are  
10 broadcast.

Parameter url - see previous definition.

Parameter tableID - see previous definition.

Parameter entityID - An ID representing a specific  
entity described in the specified table. The entity  
15 type depends on the table type. For example, if the  
table ID identifies an BAT, then the entity ID is a  
specific Bouquet ID.

Parameter someTags - see previous definition.

Parameter listener - see previous definition.

20 Return Value - see previous definition.

See also Descriptor.

**retrieveDescriptorTags** (url : Locator, tableType :  
short, listener :  
org.atsc.abstractSI.util.SIRetrievalListener) : short[]

25 Retrieves the tags of all descriptors associated  
with the entity specified by the Locator (URL) that are  
actually broadcast for the specified table type. The  
tags are returned in the same order as the descriptors  
are broadcast (i.e., in the transport stream).

30 Parameter url - see previous definition.

Parameter tableID - A Table ID of the table from which to retrieve the descriptor tags.

Parameter listener - see previous definition.

Return Value - The tags of the descriptors  
5 actually broadcast for the specified table (identified by their tags).

See also DescriptorTag.

**retrieveDescriptorTags (url : Locator, tableType : short, entityID : short, listener :  
10 org.atsc.abstractSI.util.SIRetrievalListener) : short[]**

Retrieves the tags of all descriptors associated with the entity specified by the Locator (URL) that are actually broadcast for the specified table type. The tags are returned in the same order as the descriptors  
15 are broadcast.

Parameter url - see previous definition.

Parameter tableID - see previous definition.

Parameter entityID - An ID representing a specific entity described in the specified table. The entity  
20 type depends on the table type. For example, if the table ID identifies a BAT, then the entity ID is a specific Bouquet ID.

Parameter listener - see previous definition.

Return Value - see previous definition.

25 See also DescriptorTag.

#### 2.4.2 Descriptor 530

This interface specifies the basic structure of an MPEG Descriptor. It consists of a Tag, Length and a array of bytes.

Derived from SystemInformationType 810 and  
DescriptorTag 520.

Public Operations:

**getTag () : short**

5 Returns the descriptor tag.

**getBytesAt (index : int) : byte**

Returns a particular byte within the descriptor  
content.

**getLength () : short**

10 Returns the length of the descriptor content.

**getContent () : byte[]**

Returns the whole descriptor content.

#### 2.4.3 DescriptorTag 520

15 This interface defines constants corresponding to  
the most common descriptor tags. See also Descriptor.

Public Attributes:

**NETWORK\_NAME : short = 0x40**

**SERVICE\_LIST : short = 0x41**

**STUFFING : short = 0x42**

20 **SATELLITE\_DELIVERY\_SYSTEM : short = 0x43**

**CABLE\_DELIVERY\_SYSTEM : short = 0x44**

**BOUQUET\_NAME : short = 0x47**

**SERVICE : short = 0x48**

**COUNTRY\_AVAILABILITY : short = 0x49**

25 **LINKAGE : short = 0x4A**

**NVOD\_REFERENCE : short = 0x4B**

**TIME\_SHIFTED\_SERVICE : short = 0x4C**

**SHORT\_EVENT : short = 0x4D**

**EXTENDED\_EVENT : short = 0x4E**

30 **TIME\_SHIFTED\_EVENT : short = 0x4F**



COMPONENT : short = 0x50  
MOSAIC : short = 0x51  
STREAM\_IDENTIFIER : short = 0x52  
CA\_IDENTIFIER : short = 0x53  
5 CONTENT : short = 0x54  
PARENTAL\_RATING : short = 0x55  
TELETEXT : short = 0x56  
TELEPHONE : short = 0x57  
LOCAL\_TIME\_OFFSET : short = 0x58  
10 SUBTITLING : short = 0x59  
TERRESTRIAL\_DELIVERY\_SYSTEM : short = 0x5A  
MULTILINGUAL\_NETWORK\_NAME : short = 0x5B  
MULTILINGUAL\_BOUQUET\_NAME : short = 0x5C  
MULTILINGUAL\_SERVICE\_NAME : short = 0x5D  
15 MULTILINGUAL\_COMPONENT : short = 0x5E  
PRIVATE\_DATA\_SPECIFIER : short = 0x5F  
SERVICE\_MOVE : short = 0x60  
SHORT\_SMOOTHING\_BUFFER : short = 0x61  
FREQUENCY\_LIST : short = 0x62  
20 PARTIAL\_TRANSPORT\_STREAM : short = 0x63  
DATA\_BROADCAST : short = 0x64  
AC3\_AUDIO : short = 0x81  
PROGRAM\_IDENTIFIER : short = 0x85  
CAPTION\_SERVICE : short = 0x86  
25 CONTENT\_ADVISORY : short = 0x87  
EXTENDED\_CHANNEL\_NAME : short = 0xA0  
SERVICE\_LOCATION : short = 0xA1  
TIME\_SHIFTED\_ATSC\_SERVICE : short = 0xA2  
COMPONENT\_NAME : short = 0xA3

30 2.4.4 TableType 510

This interface defines a set of constants corresponding to MPEG, ATSC and DVB table types, or private tables such as DCII.

Public Attributes:

5       **UNKNOWN** : short = 0  
      **CA\_INFO** : short = 1  
      MPEG PSI CAT table.  
      **SERVICE\_INFO** : short = 2  
      MPEG PSI PMT table.  
10       **TRANSPORT\_INFO** : short = 3  
      MPEG PSI TSMT table.  
      **NAVIGATION\_INFO** : short = 4  
      DVB BAT and SDT tables, and ATSC VCT table.  
      **NET\_INFO** : short = 5  
15       DVB NIT table and ATSC MGT table.  
      **RATING\_INFO** : short = 6  
      ATSC RRT table.  
      **TIME\_INFO** : short = 7  
      DVB TOT table and ATSC STT table.  
20       **EVENT\_INFO** : short = 8  
      DVB EIT table and ATSC EIT table.

## 2.5 Pipeline Package (FIG. 6)

25       This package represents the pipeline (or network) view. It represents objects related to the transport delivery mechanism such as MPEG-2. It could also include information about non-MPEG delivery protocols such as IP.

### 2.5.1       SatelliteInformation 605

This interface represents information about Satellites in a satellite delivery network.

Public Operations:

**getSatelliteID () : int**

5 Returns the ID of this Satellite.

**getSatelliteName () : String**

Returns the full Satellite name.

**getSatelliteAbbreviation () : String**

Returns the abbreviated satellite name.

10 **getNumberOfTransponders () : int**

Returns the number of Transponders available on this Satellite.

**getTransponderNumbers () : int[]**

15 This method returns an array of transponder numbers available on this Satellite.

**getTransponderName (transponderNumber : int) : String**

Returns the name of the specified Transponder.

**getTransponderNumber (transportStreamID : int) :**

20 **int**

Returns the transponder number that delivered the specified TS.

#### 2.5.2 BouquetInformation 630

25 This interface represents information about a bouquet (a collection of services which can span TS and network boundaries), which is a DVB-specific concept.

Public Operations:

**getBouquetID () : int**

30 This method returns the ID of this Bouquet definition.

**getName () : java.lang.String**

This method returns the name of this Bouquet.

### 2.5.3 TransportStreamInfo 660

This interface provides information about a TS.

5 Derived from SystemInformationType 810.

Public Operations:

**getLocator () : org.davic.net.Locator**

This method returns the URL of this TS.

**getNetworkID () : int**

10 Returns the ID of the Network which carries this  
TS.

**getTransportStreamID () : int**

This method returns the ID of this TS.

**getDescription () : String**

15 Returns a textual name or a description of this  
TS.

**getOriginalNetworkID () : int**

This method returns the Network ID of the Network  
where this TS originated from.

20 This method returns the same ID as getNetworkID if  
this TS originated on the Network that carries it.

### 2.5.4 NetworkInformation

This interface provides descriptive information  
about a Network of Transport Streams.

25 Public Operations:

**getNetworkID () : int**

This method returns the ID of this Network

**getLocator () : org.davic.net.Locator**

This method returns the URL of this Network.

**getNetworkName () : java.lang.String**

This method returns the name of this network.

#### 2.5.5 MPEGPipeline 670

The MPEG SI Manager represents MPEG-2 specific SI.

5     Derived from PipelineInformation 650 and  
MPEGTableDescriptors 540.

Public Operations:

10     **retrieveSatelliteInformation (transportStreamID :  
int, listener :  
org.atsc.abstractSI.util.SIRetrievalListener) :  
SatelliteInformation[]**

This method returns an array of object  
representing information about the Satellites carrying  
the specified TransportStream.

15     If no TS is specified, it returns an array of  
objects representing information about all known  
Satellites.

It returns an empty array if this is not a  
satellite network.

20     **retrieveBouquet (bouquetID : int, listener :  
org.atsc.abstractSI.util.SIRetrievalListener) :  
org.atsc.abstractSI.pipeline.BouquetInformation**

This method returns information about the  
specified Bouquet.

25     **retrieveBouquets (listener :  
org.atsc.abstractSI.util.SIRetrievalListener) :  
BouquetInformation[]**

Returns an array of BouquetInformation objects  
representing all known Bouquets.

```
        retrieveTransportStream (url : Locator, listener :  
org.atsc.abstractSI.util.SIRetrievalListener) :  
TransportStreamInfo
```

5       The method returns a specific TransportStreamInfo  
object representing information about the specified TS.

```
        retrieveTransportStreams (networkID : int,  
listener :  
org.atsc.abstractSI.util.SIRetrievalListener) :  
TransportStreamInfo[]
```

10       Returns an array of TransportStreamInfo objects  
representing all known Transport streams for the  
specified network.

```
        retrieveNetwork (networkID : int, listener :  
org.atsc.abstractSI.util.SIRetrievalListener) :  
15       NetworkInformation
```

      Returns the NetworkInformation specified by its  
ID.

```
        retrieveNetworks (listener :  
org.atsc.abstractSI.util.SIRetrievalListener) :  
20       NetworkInformation[]
```

      Returns an array of NetworkInformation objects  
representing all known networks.

```
        addListener (listener : SIChangeListener) : void
```

25       Called to register a SIChangeListener 815 for  
changes related to changes in objects provided by the  
SIManager 240.

      This includes TransportStreamInfo 660,  
NetworkInformation 610, etc. but excludes TvChannel 225  
and ProgramEvent 340 which can be listened to via the  
30       appropriate collections, such as the ChannelCollection  
220 and ProgramSchedule 320. Therefore, the

SIInfoChangeEvent 850 will be delivered to the listener.

```
    removeListener (listener : SIChangeListener) :  
void
```

5           Called to deregister a SIChangeListener 815.

#### 2.5.6       SISpecificManager 640

This SI manager has specific information about the content delivery media. Derived from SIManager 240.

Public Operations:

```
10       getPipelineInfo () :  
org.atsc.abstractSI.pipeline.PipelineInformation[]
```

This method returns a list of objects representing different content delivery media, such as MPEG-2 transport.

#### 15       2.5.7       PipelineInformation 650

This abstract class is a placeholder for different content delivery media. It must be extended by an object that is specific to a particular transport mechanism, such as MPEG-2 TS.

#### 20       2.6   Data Package (FIG. 7)

This package represents a schedule of data events. Similar to audio/video programs, there may also be data events scheduled for a given TvChannel.

#### 25       2.6.1       TvChannelWithData 710

This interface extends the TvChannelDetails by adding access to the data event schedule associated

with this TvChannel. Derived from TvChannelDetails  
245.

Public Operations:

**getDataSchedule () :**

5 **org.atsc.abstractSI.data.DataSchedule**

This method returns a schedule of data events.

2.6.2 DataSchedule 720

This interface represents a collection of data  
events for a given TvChannel ordered by time.

10 Public Operations:

**addListener (listener :**

**org.atsc.abstractSI.util.SIChangeListener) : void**

15 Called to register an SIChangeListener 815 for  
events related to changes of the DataEvents 730 on this  
schedule. The DataChangeEvent 840 is delivered to the  
specified listener when any DataEvent 730 on this  
schedule changes.

**removeListener (listener :**

**org.atsc.abstractSI.util.SIChangeListener) : void**

20 Called to deregister a SIChangeListener.

**retrieveEvent (when : java.util.Date, listener :**

**org.atsc.abstractSI.util.SIRetrievalListener) :**

**org.atsc.abstractSI.data.DataEvent**

Returns the data event for the specified time.

25 The data event which contains the specified time will  
be returned. The specified time falls between the data  
event's start time and the start time plus the event's  
duration.

30 Null is returned when the specified time does not  
fall inside any known data event.



```

        retrieveEvents (startOfInterval : java.util.Date,
endOfInterval : java.util.Date, listener :
org.atsc.abstractSI.util.SIRetrievalListener) :
org.atsc.abstractSI.data.DataEvent[]

```

5       Returns all known data events on this channel for  
the specified time interval.

```

        retrieveEvent (locator : org.davic.net.Locator,
listener :
org.atsc.abstractSI.util.SIRetrievalListener) :
10       DataEvent

```

This method retrieves a data event matching the  
locator. The event must be part of this schedule.

### 2.6.3       DataEvent 730

15       This object represents a data event associated  
with a TvChannel 225 for a particular time interval.  
In ATSC, the information is delivered in DIT tables.  
DIT is an extension of PSIP. It is similar to the  
EITs, but it announces data events (not audio-visual  
events) and is defined in the ATSC T3/S13 Data  
20       Broadcast Specification.

Derived from SIUpdate 830.

Public Operations:

```

getLocator () : org.davic.net.Locator

```

Returns a Locator representing this data event.

```

25       getStartTime () : java.util.Date

```

Returns the start time of this data event.

```

getEndTime () : java.util.Date

```

Returns the end time of this data event.

```

getDuration () : long

```

Returns the duration of this data event in seconds.

**getTitle () : java.lang.String**

Returns the data event title.

5       **retrieveDescription (listener :  
org.atsc.abstractSI.util.SIRetrievalListener) :  
java.lang.String**

10       Returns a textual description of the event. This information comes from the ETT in ATSC, or an Extended Event Descriptor in DVB. An empty string will be returned when no ETT is available for this event.

**retrieveContentAdvisory (listener :  
org.atsc.abstractSI.util.SIRetrievalListener) :  
org.atsc.abstractSI.guide.ContentRatingAdvisory**

15       Returns a list of Content Advisory information for each Rating Region.

**getTvChannel () :  
org.atsc.abstractSI.navigation.TvChannel**

20       Returns the TvChannel this data event is associated with. In DVB, events and TvChannels are associated via the service ID; in ATSC, they are associated via the source ID.

## 2.7 Utility Package (FIG. 8)

25       This package defines classes and interfaces that provide support functions to the SI packages. This includes the notification mechanism (events and listeners), the Factory Method for creating the SIManager object, and all Exceptions.

The Factory Method is a methodology and structure for solving a problem, as known from the field of object-oriented programming.

#### 2.7.1 SIFactory 805

5 This class provides a mechanism to create objects that implement the SIManager interface 240. This class is modeled after the Factory Method design pattern.

Public Operations:

**SIFactory () :**

10

Constructor

**getSIManager () : SIManager**

Returns an implementation of the SIManager interface or null if not available.

#### 2.7.2 SIChangeListener 815

15 The SIChangeListener interface shall be implemented by using application classes to listen to changes in SI objects. It provides a method to be called back by the listened to SI object to notify of an event.

20 Public Operations:

**SICChange (event : SICChangeEvent) : void**

This method gets called when an existing SI object is changed, a new SI object is detected or an existing SI object is no longer available.

25

#### 2.7.3 SICChangeEvent 834

SICChangeEvent objects 834 are sent to SIChangeListeners 815 to notify of a new event.

Derived from EventObject 820.

Public Operations:

**getType () : byte**

Returns the event type (the possible values are defined in the SIChangeEvent interface).

5           2.7.4       SIChangeEvent

This interface defines the constants corresponding to the SIChangeEvent type values.

Public Attributes:

**OBJECT\_CHANGED : byte = 1**

10           An existing object has changed.

**NEW\_OBJECT : byte = 2**

New object detected.

**OBJECT\_UNKNOWN : byte = 3**

Object no longer available.

15           2.7.5       TvChannelChangeEvent 835

This event delivers information about a particular TvChannel. Derived from SIChangeEvent 834.

Public Operations:

**getChangedChannel () : Locator**

20           This method is called to determine which channel has changed.

2.7.6       ProgramChangeEvent 845

This event delivers information about a particular ProgramEvent.

25           Derived from SIChangeEvent 834.

Public Operations:

**getChangedProgram () : Locator**

This method is called to determine which ProgramEvent has changed.

#### 2.7.7 SIInfoChangeEvent 850

5 This event delivers information about a particular high-level SI object usually obtained via the SI Manager. Derived from SIChangeEvent 834.

Public Operations:

**getSIObjectType () : short**

10 This method is called to determine which type of an SI object has changed. This may be TransportStreamInfo 660, NetworkInformation 610, BouquetInformation 630, RatingRegion 330, etc.

**getSIObjectID () : int**

15 This method returns the ID of the changed SI object whose type is identified by the getSIObjectType method. For example, if the SIObjectType is TransportStreamInfo, then the SIObjectID will be the TS ID.

#### 2.7.8 SIUpdate 830

20 This interface can be associated with any SI entity. It provides information about when the data was last updated. The SI database may have new information which all listeners get notified about.

Public Operations:

25 **getUpdateTime () : java.util.Date**

Return the time when the information contained in the object that implements this interface was last updated.

Return Value - The date of the last update.

#### 2.7.9 SIDelayedDeliveryException 875

This exception is thrown when requested data is not available immediately (e.g., not cached) and signals an asynchronous delivery of the data.

5       Derived from Exception 860.

Public Operations:

**getRequest () : org.atssc.abstractSI.util.SIRequest**

10       This method returns an object representing the asynchronous request. It can be used to cancel the request and to associate it with the event delivering the requested data.

#### 2.7.10 SIRetrievalListener 870

15       This interface shall be implemented by application classes to receive events about completion of asynchronous SI requests.

20       In general, the listener registers itself at the time of the potentially asynchronous call (as one of the parameters). The listener is registered for one call only and is automatically deregistered when the request is satisfied.

Public Operations:

**postRetrievalEvent (event :  
org.atssc.abstractSI.util.SIRetrievalEvent) : void**

25       This method is called to deliver an asynchronous SI retrieval event to the listener.

#### 2.7.11 SIRetrievalEvent 865

This event delivers data requested asynchronously by any of the "retrieveXXX" calls. All the methods

which start with the word "retrieve" fall into this category, e.g., retrieveDetails() in block 225, retrievePresentEvent() in block 320, etc.

5 It either delivers the data itself or an indication of a failure. It also provides mechanism to associate this event with the original request using the request sequence number.

This event is delivered only when the "retrieveXXX" call throws the SIDelayedDelivery exception 875, which contains the SIRequest object 886 with the request sequence number.

Derived from EventObject 820.

Public Operations:

**getSequenceNumber () : int**

15 This method returns the sequence number assigned to the original asynchronous retrieval request to which this event is responding.

#### 2.7.12 SIRequest 886

20 This object is used to facilitate asynchronous retrieval of SI data. This object can be used to cancel a pending request and to associate the request with a event delivering the requested data.

Public Operations:

**cancelRequest () : boolean**

25 This method will cancel a pending request.

Return Value 'True' indicates a successful cancellation of this request. 'False' indicates that the request has already been delivered and cannot be cancelled.

30 **getSequenceNumber () : int**

This method returns a number associated with this asynchronous retrieval call. It can be used to pair the subsequent event with this request.

#### 2.7.13      SIREtrievalSuccessEvent 884

5      This event signals that the requested data has been retrieved and delivered.

Derived from SIREtrievalEvent 865.

#### 2.7.14      SIREtrievalSingleSuccessEvent 892

10      The event delivers a single object that was requested. Derived from SIREtrievalSuccessEvent 884.

Public Operations:

**getResult () : java.lang.Object**

This method is used to obtain the data delivered by this event.

15      The specific type (class) of the returned object can be anticipated from the context of the original call: it is the same object that would be returned by the "retrieveXXX" method synchronously.

#### 2.7.15      SIREtrievalMultipleSuccessEvent 894

20      The event delivers a array of objects that were requested. Derived from SIREtrievalSuccessEvent 884.

Public Operations:

**getResult () : java.lang.Object[]**

25      This method is used to obtain the data delivered by this event.

The specific type (class) of the returned objects can be anticipated from the context of the original



call: it is the same object that would be returned by the "retrieveXXX" method synchronously.

#### 2.7.16 SIRetrievalFailEvent 882

5 This event signals a failure to deliver the requested data. Possible reasons for a failure might be that the data is not present in the TS or resources were not available to obtain the data.

Derived from SIRetrievalEvent 865.

#### 2.7.17 SIException 880

10 This is a generic exception which can be thrown when a particular SI-related call contains invalid parameters. Derived from Exception 860.

#### 2.7.18 SystemInformationType 810

15 This interface provides access to specific SI databases (e.g., DVB SI database, ATSC PSIP database, etc.)

Public Attributes:

**ATSC\_PSIP : short = 1**

**DVB\_SI : short = 2**

20 **SCTE\_SI : short = 3**

Public Operations:

**getSystemInformationType () : short**

25 Called to determine the specific SI format this element was delivered in (e.g., ATSC PSIP, DVB SI, etc.).

#### 2.7.19 DataChangeEvent 840

This event delivers information about a particular data event. Derived from SIChangeEvent 834.

Public Operations:

**getChangedData () : org.davic.net.Locator**

5           2.7.20      SINotAvailableException 890

The exception indicates that the requested data is not available for the particular instance.

Derived from SIException 880.

10           2.7.21      DeliverySystemType 807

This interface provides information about the delivery system type (e.g., cable, satellite, etc.) of the particular object implementing this interface.

Public Attributes:

15           **CABLE\_DELIVERY\_SYSTEM : short = 1**

**SATELLITE\_DELIVERY\_SYSTEM : short = 2**

**TERRESTRIAL\_DELIVERY\_SYSTEM : short = 3**

20           Accordingly, it can be seen that the present invention provides an API that allows applications at a digital television terminal to recover SI from a digital TS without regard to the specific format type. The API abstracts the relevant portions of the SI to provide it in a format that is usable by the terminal.

25           The system is suitable for use, e.g., with SI formats including MPEG PSI, DVB SI, and ATSC PSIP, and private SI.

30           Although the invention has been described in connection with various specific embodiments, those skilled in the art will appreciate that numerous

adaptations and modifications may be made thereto without departing from the spirit and scope of the invention as set forth in the claims.

5 For example, while various syntax elements have been discussed herein, note that they are examples only, and any syntax may be used.

Moreover, the invention is suitable for use with virtually any type of network, including cable or satellite television broadband communication networks,  
10 local area networks (LANs), metropolitan area networks (MANs), wide area networks (WANs), internets, intranets, and the Internet, or combinations thereof.

Additionally, known computer hardware, firmware and/or software techniques may be used to implement the  
15 invention.

What is claimed is:

1. A television set-top terminal, comprising:  
a computer readable medium having computer program code means; and  
means for executing said computer program code means to implement an Application Programming Interface (API), wherein:  
the API is adapted to abstract system information (SI) in a digital television transport stream that is received by the terminal in any one of a plurality of different formats; and  
the API provides the abstracted SI in a generic format that is suitable for use by an application at the terminal regardless of the specific format in which the SI is provided.
2. The terminal of claim 1, wherein:  
the API provides a navigation function to allow the terminal to navigate among television channels in the transport stream in accordance with the abstracted SI.
3. The terminal of claim 1, wherein:  
the API provides a program guide function for implementing an electronic program guide for television channels in the transport stream in accordance with the abstracted SI.

4. The terminal of claim 1, wherein:  
the API provides a selection function for selection of specific television channels of the transport stream in accordance with the abstracted SI.

5. The terminal of claim 1, wherein:  
the API provides a descriptor retrieval function for recovering descriptors of the SI in accordance with the abstracted SI.

6. The terminal of claim 1, wherein:  
the API provides a utility function containing supporting objects, including events and exceptions, for supporting synchronous delivery of the SI to the application.

7. The terminal of claim 1, wherein:  
the API provides a data function for implementing a guide to data services in the transport stream in accordance with the abstracted SI.

8. The terminal of claim 1, wherein:  
the API provides a pipeline function for providing information regarding a physical delivery mechanism of the transport stream in accordance with the abstracted SI.

9. The terminal of claim 1, wherein:  
the plurality of available SI formats include at least one of:

Motion Picture Experts Group (MPEG) Program  
Specific Information (PSI);  
Digital Video Broadcasting (DVB) System  
Information (SI);  
Advanced Television Systems Committee (ATSC)  
Program and System Information Protocol (PSIP);  
Cable SI Digital Video Standard 234 of the Society  
of Cable and Television Engineers; and  
private SI.

10. The terminal of claim 1, further comprising:  
a memory for storing the service information as  
the transport stream is received at the terminal;  
wherein:

the API provides a retrieve function call for  
enabling a calling application at the terminal to  
retrieve the service information such that SI that is  
available in the memory is returned essentially  
immediately as a direct return value, and, if the  
service information is not available in the memory,  
said retrieve function call returns an exception  
signaling to the calling application that the SI is to  
be delivered to the calling application asynchronously.

11. The terminal of claim 10, wherein:

the API provides a utility function containing  
supporting objects, including events and exceptions,  
for supporting the asynchronous delivery of the SI to  
the calling application.

12. The terminal of claim 1, wherein:  
the transport stream is provided in one of a plurality of available transport stream formats; and  
the API abstracts the SI to provide it in a generic format that is suitable for use by the application regardless of the specific transport stream format in which the SI is provided.

13. The terminal of claim 12, wherein:  
the API provides a base package having information that is generic to the available transport stream formats; and

the API is adapted for use with a separate package having information that is specific to the format of the transport stream that is received by the terminal.

14. The terminal of claim 1, wherein:  
the API provides incremental retrieval of the service information by allowing a calling application at the terminal to obtain a subset of the SI that is available at the terminal, perform an analysis of the obtained SI, and retrieve additional SI if required based on the analysis.

15. The terminal of claim 14, wherein:  
the additional SI is retrieved from the subset of the SI that is available at the terminal in a memory of the terminal.

16. The terminal of claim 14, wherein:  
the additional SI is retrieved from the transport stream.

17. The terminal of claim 1, wherein:  
the API enables a calling application at the terminal to recover a subset of the SI in the transport stream while rejecting other SI in the transport stream that is not required by the calling application.

18. The terminal of claim 1, wherein:  
the API provides a filtering function that is responsive to the abstracted SI to allow the application to specify at least one service in the transport stream in which the application is interested.

19. The terminal of claim 18, wherein:  
the filtering function is adapted to filter services in the transport stream based whether the services are associated with at least one of:  
a transport stream, when services from multiple transport streams are available;  
a network;  
a bouquet;  
a satellite;  
a satellite transponder;  
a service name;  
a service/channel number;  
a favorite channel; and  
a theme.



20. The terminal of claim 1, wherein:  
the API is implemented using a plurality of packages for abstracting the SI; and  
different applications at the terminal include only specific ones of the packages according to specific portions of the abstracted SI that each application requires.

21. A method for use in a television set-top terminal for processing system information (SI) in a digital television transport stream that is received by the terminal in any one of a plurality of different formats, comprising the steps of:

providing a computer readable medium having computer program code means; and

executing said computer program code means to implement an Application Programming Interface (API),  
wherein:

the API is adapted to abstract the system information (SI) from any one of the plurality of different formats; and

the API provides the abstracted SI in a generic format that is suitable for use by an application at the terminal regardless of the specific format in which the SI is provided.

1/12

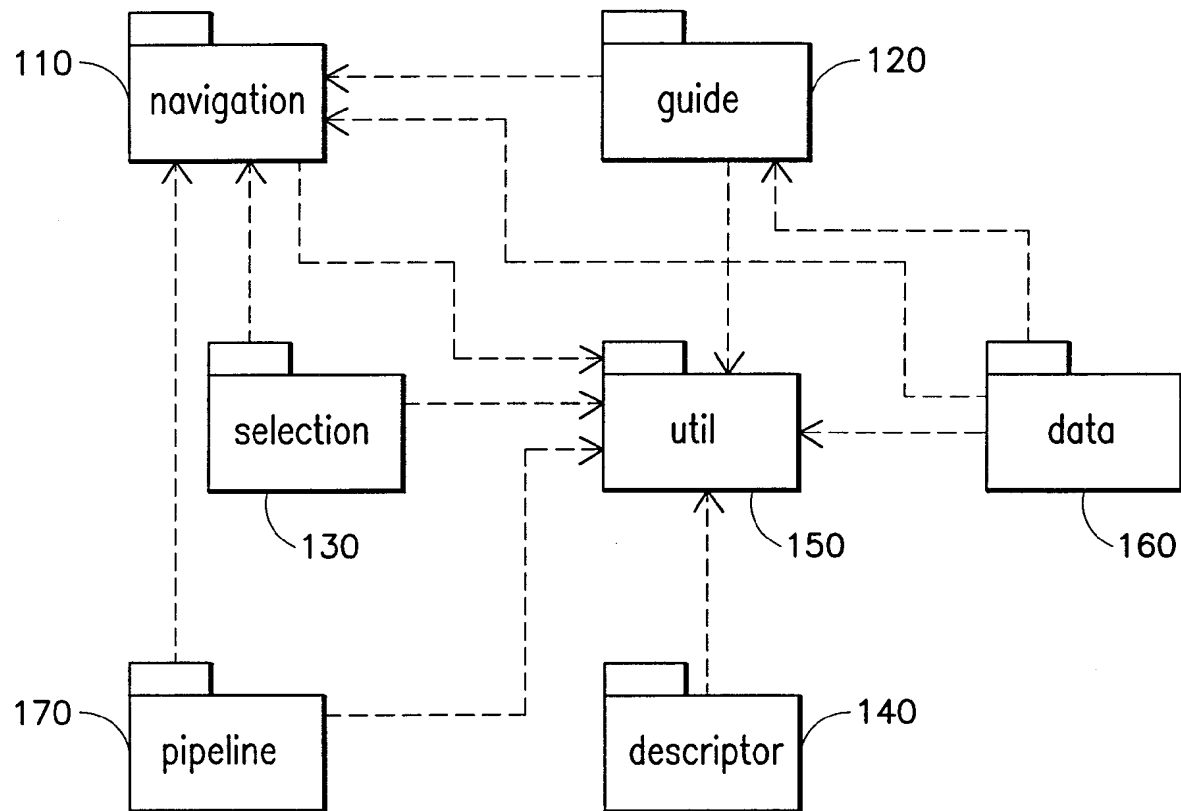


FIG.1

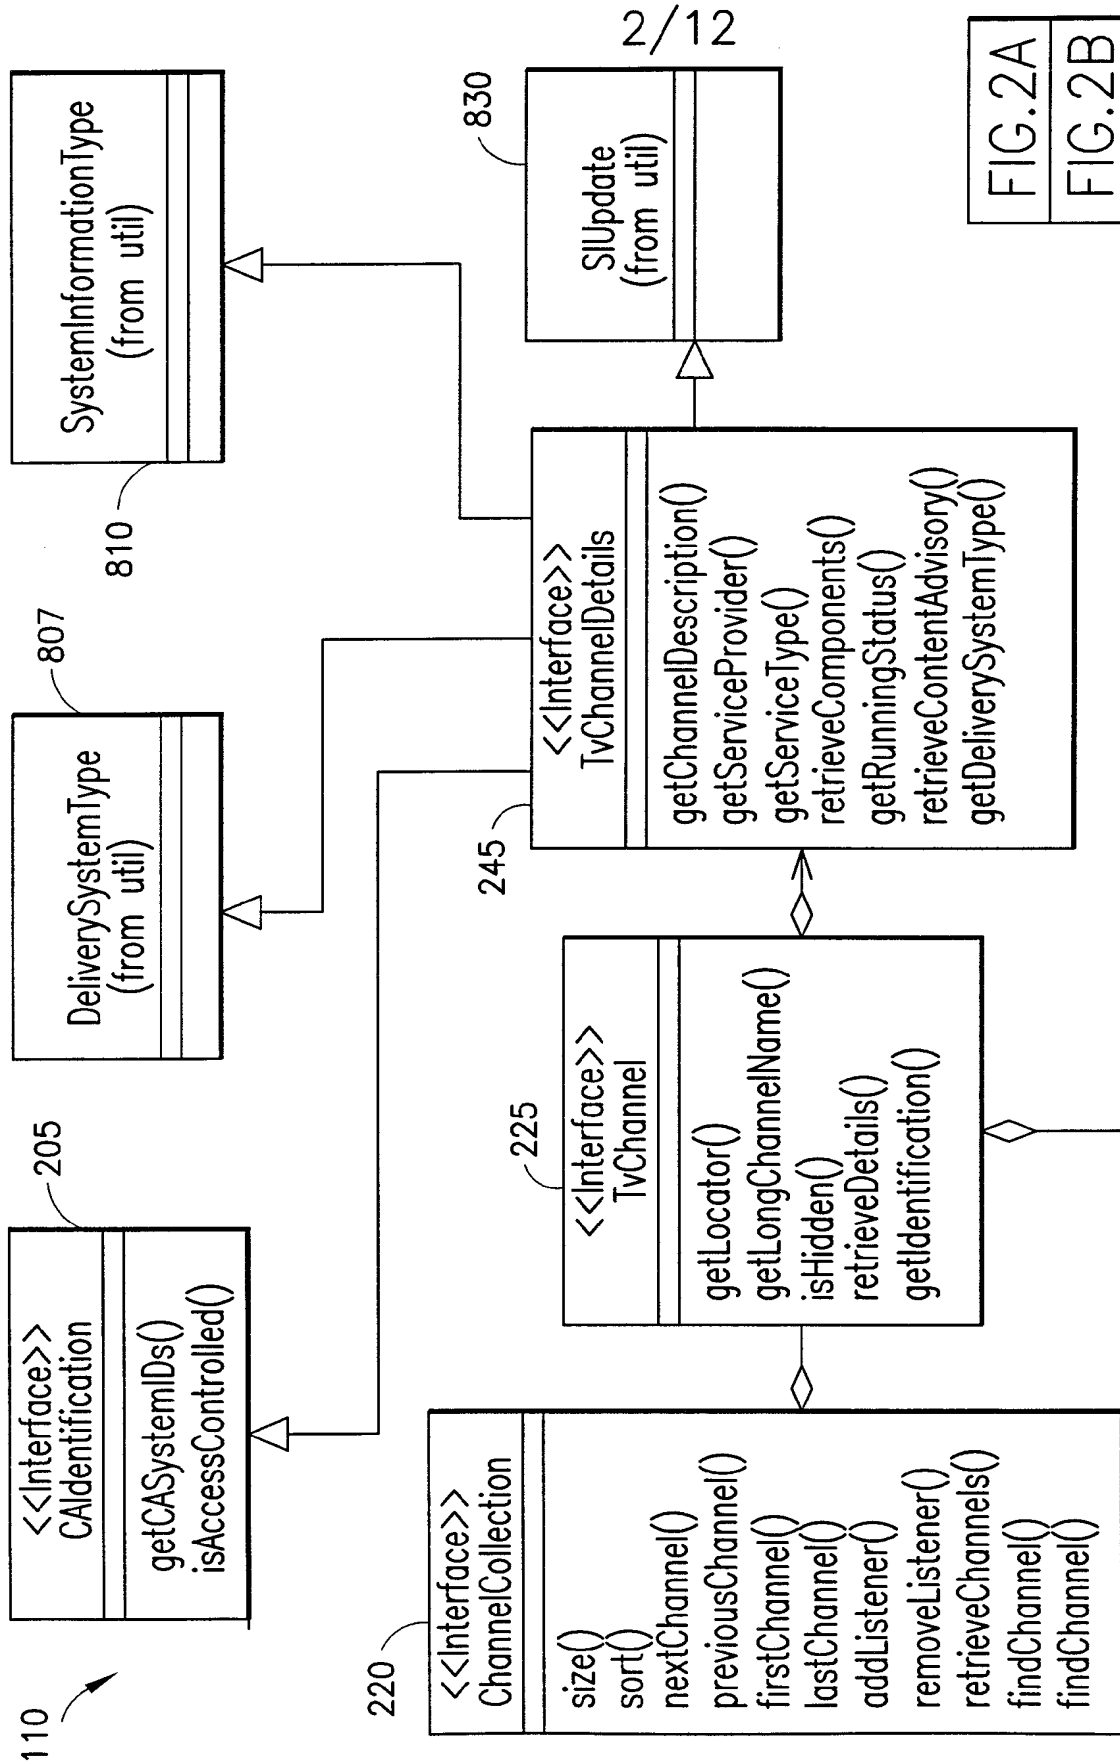


FIG. 2

FIG. 2A

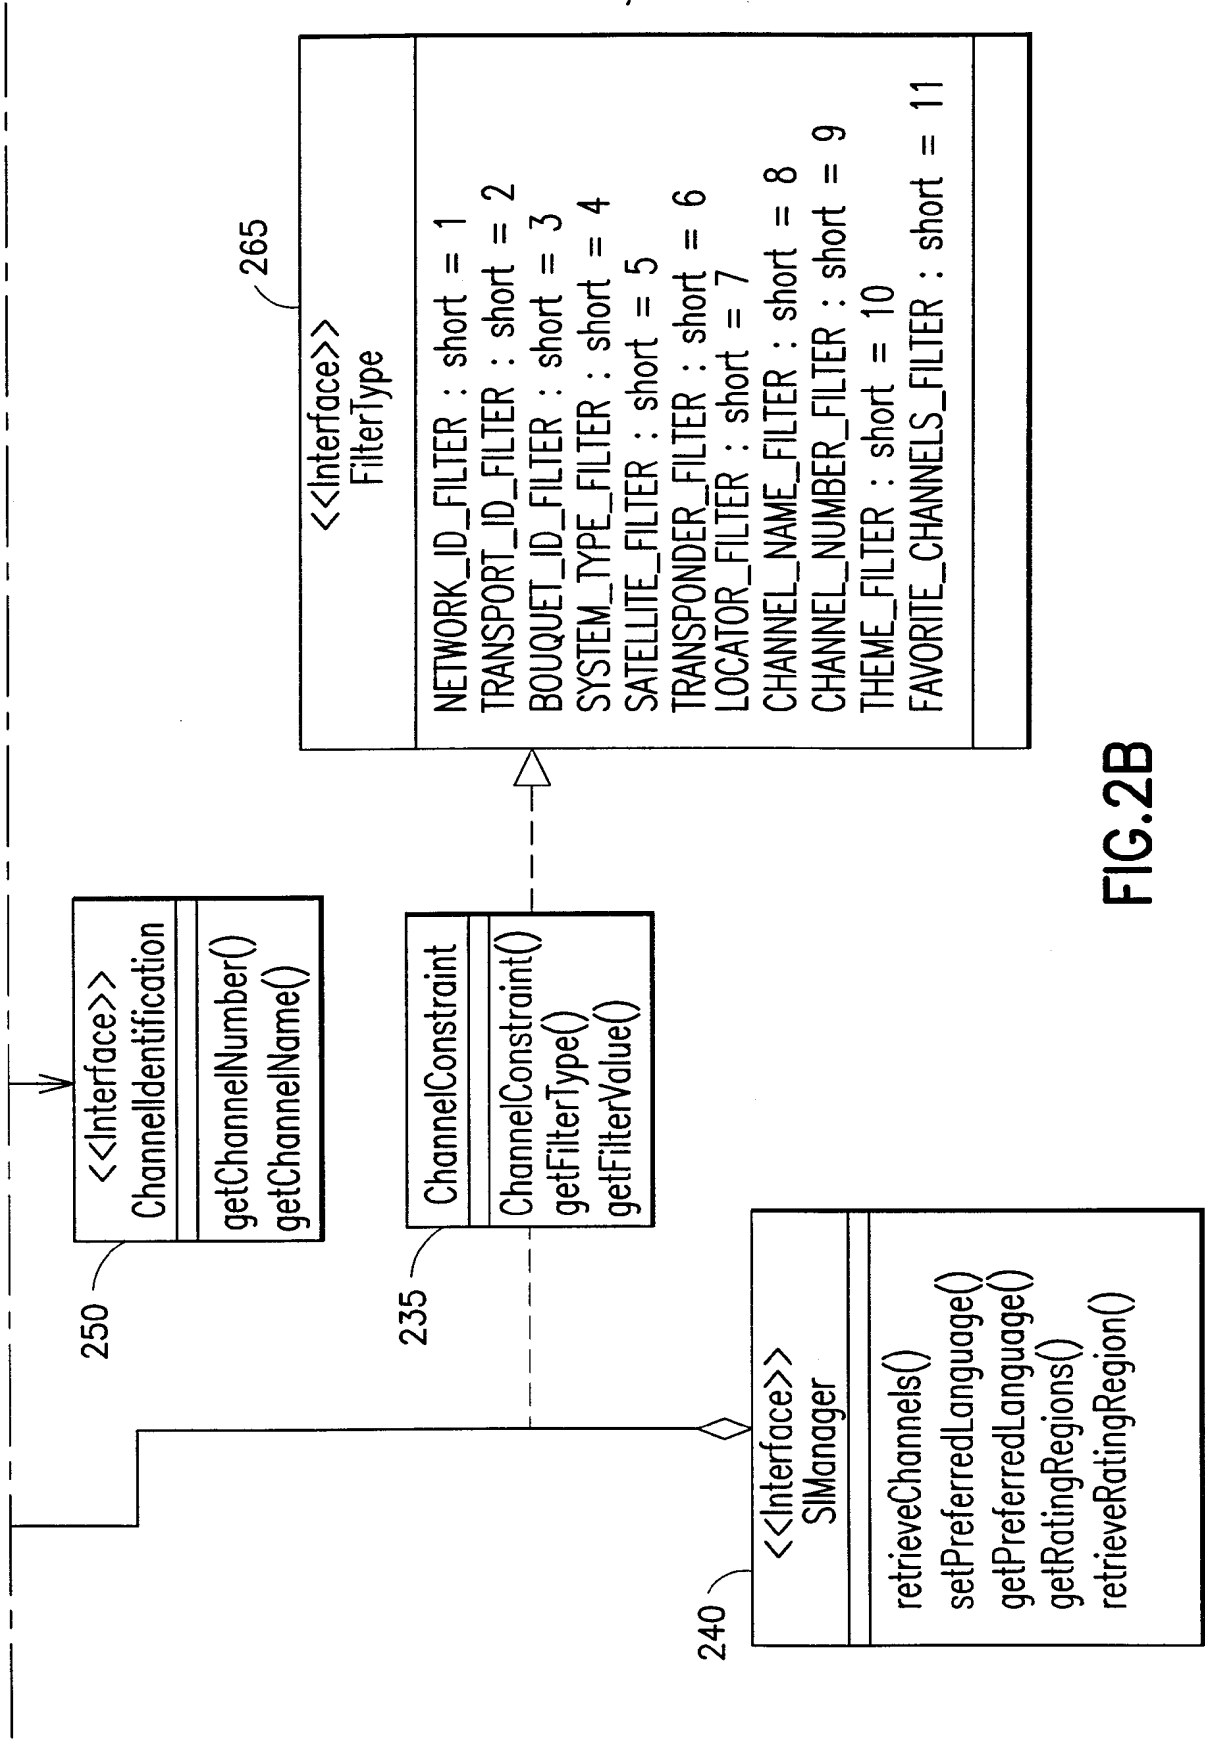


FIG.2B

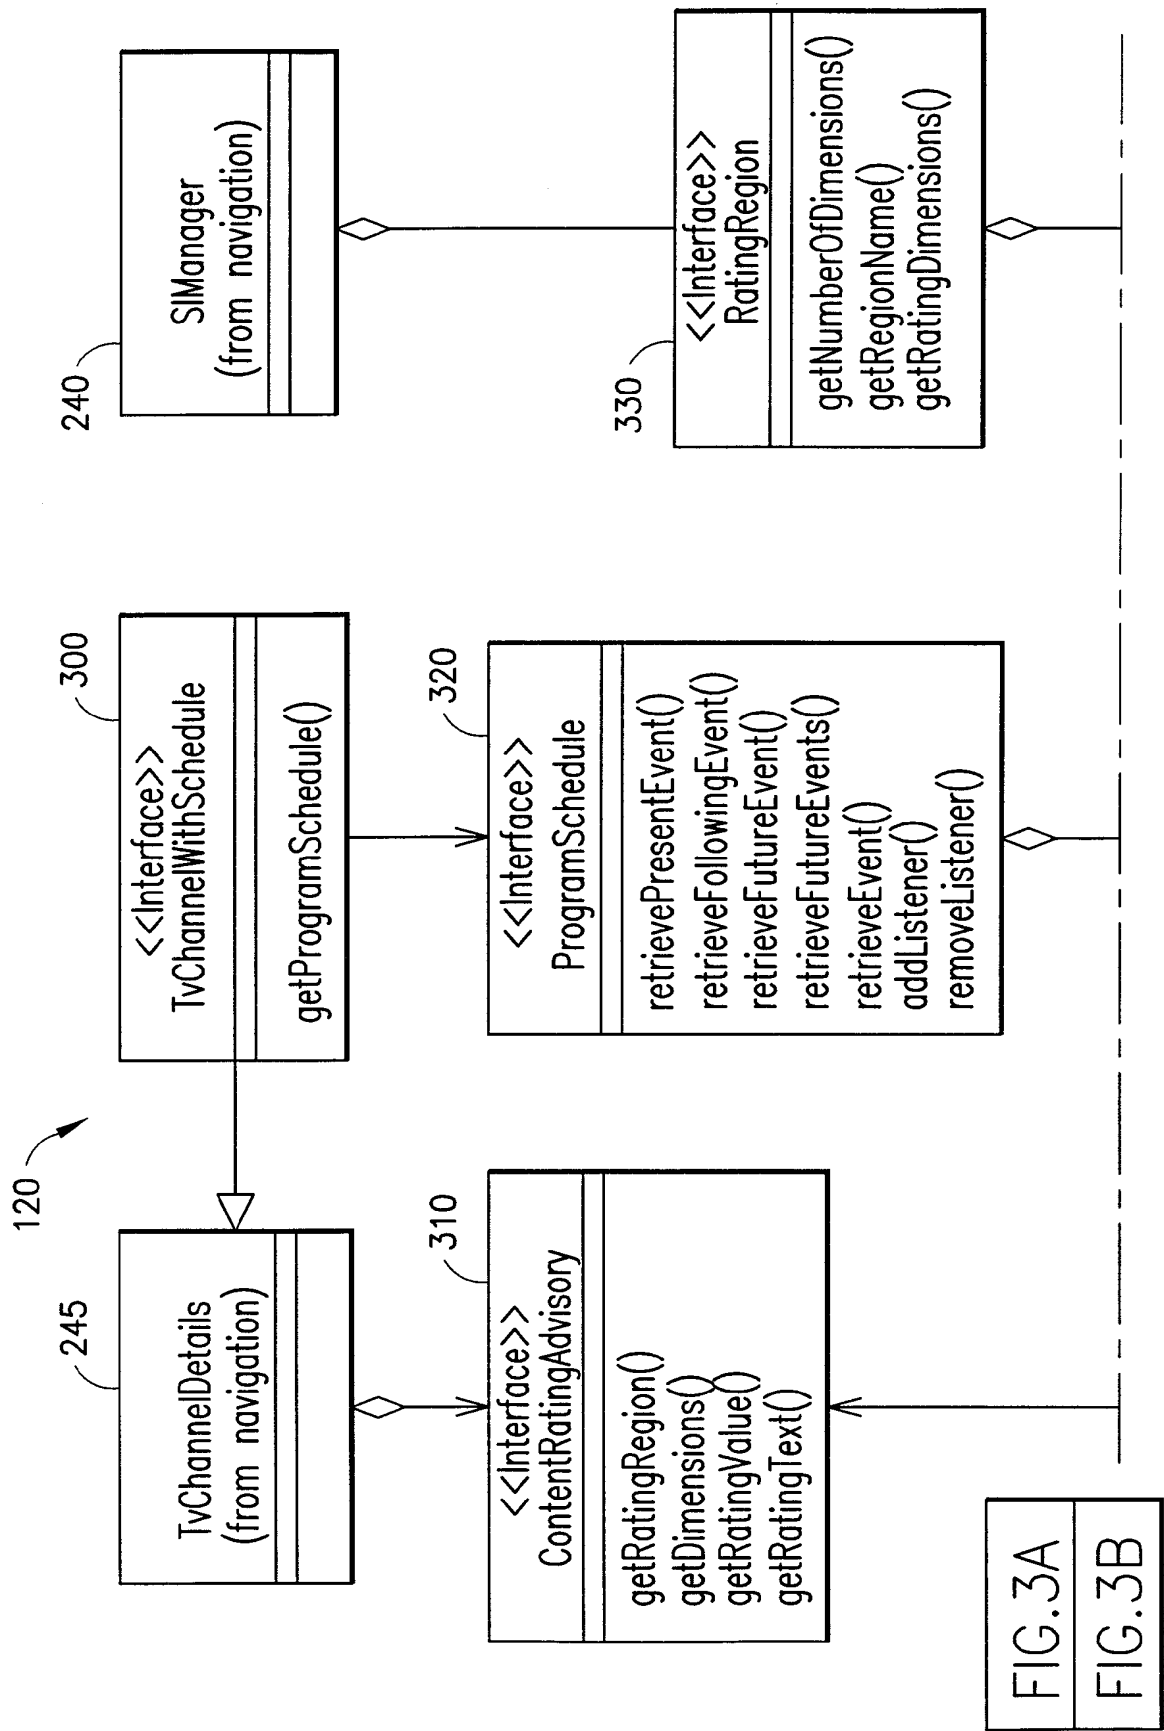


FIG.3A

FIG.3

5/12

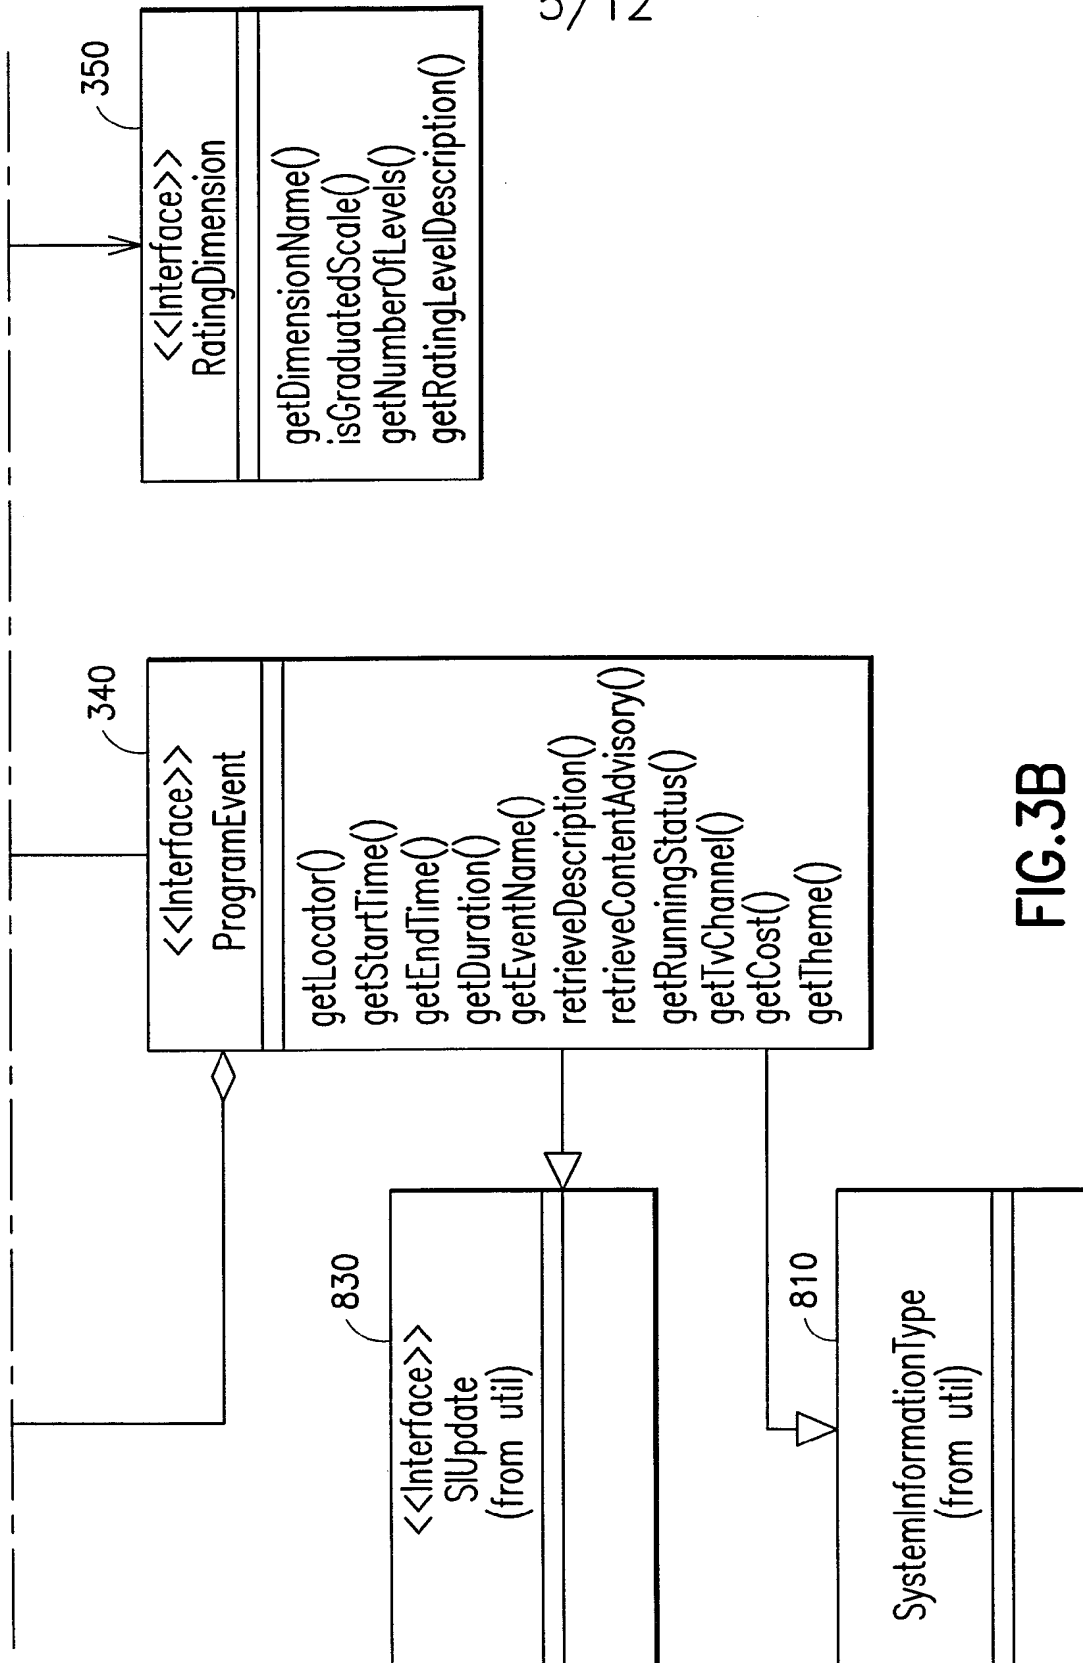


FIG.3B

6/12

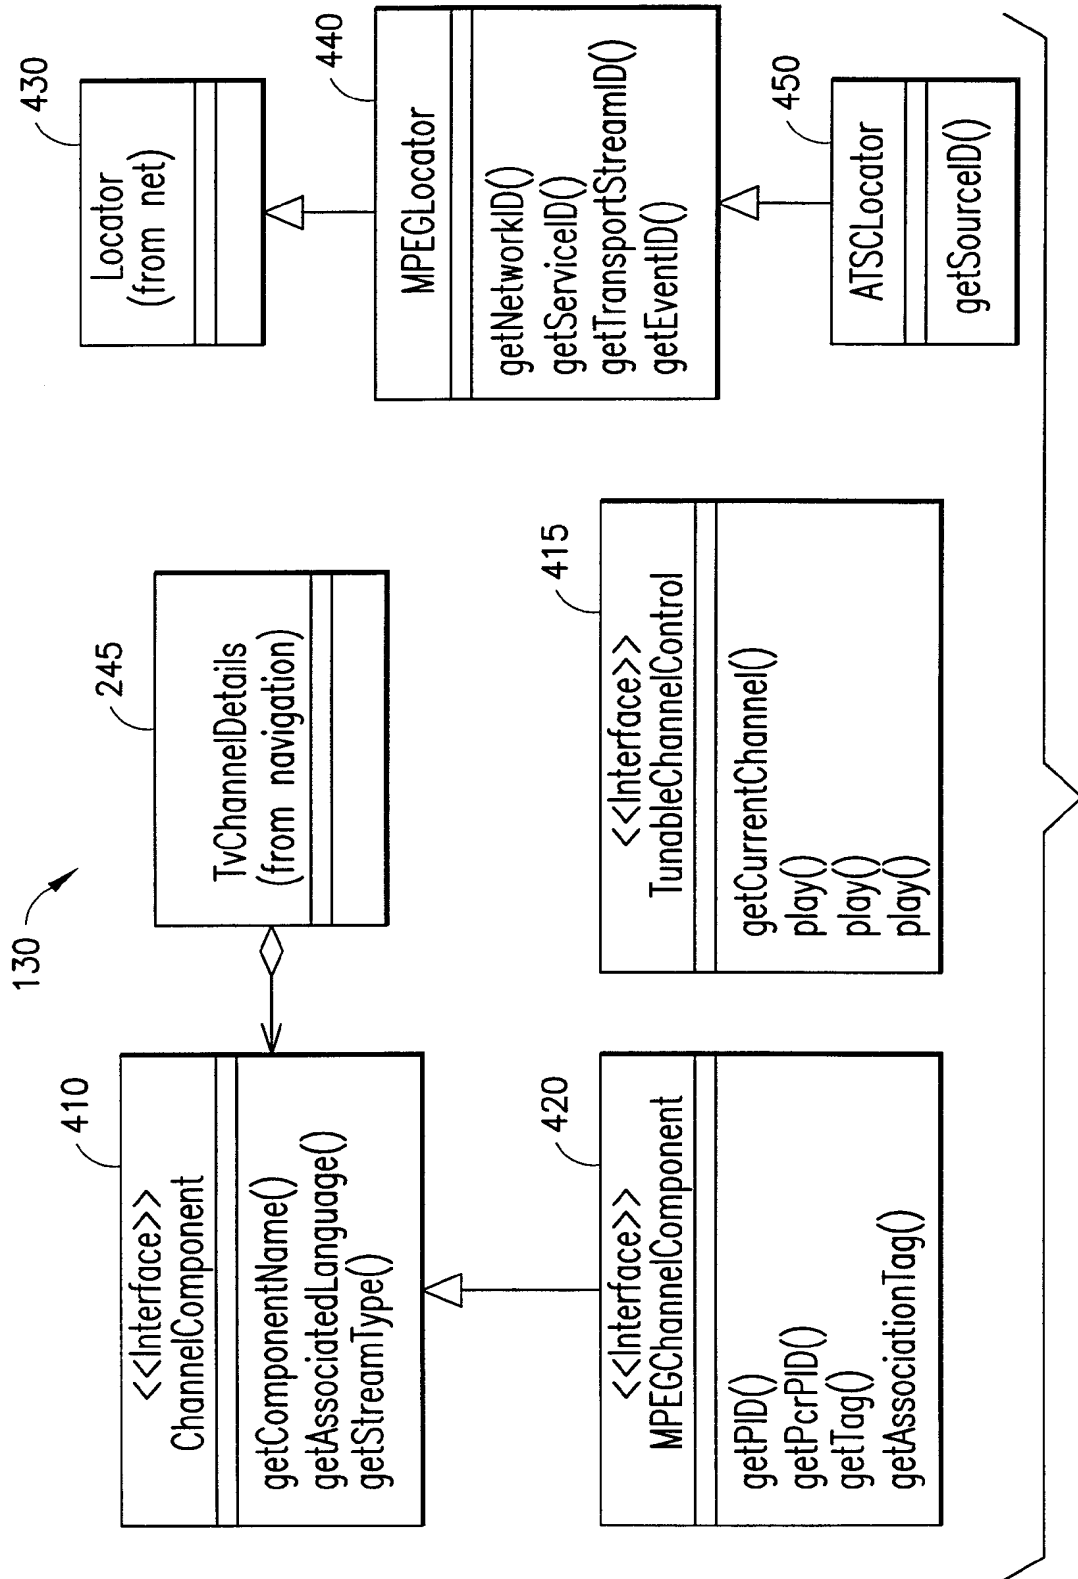


FIG.4

7/12

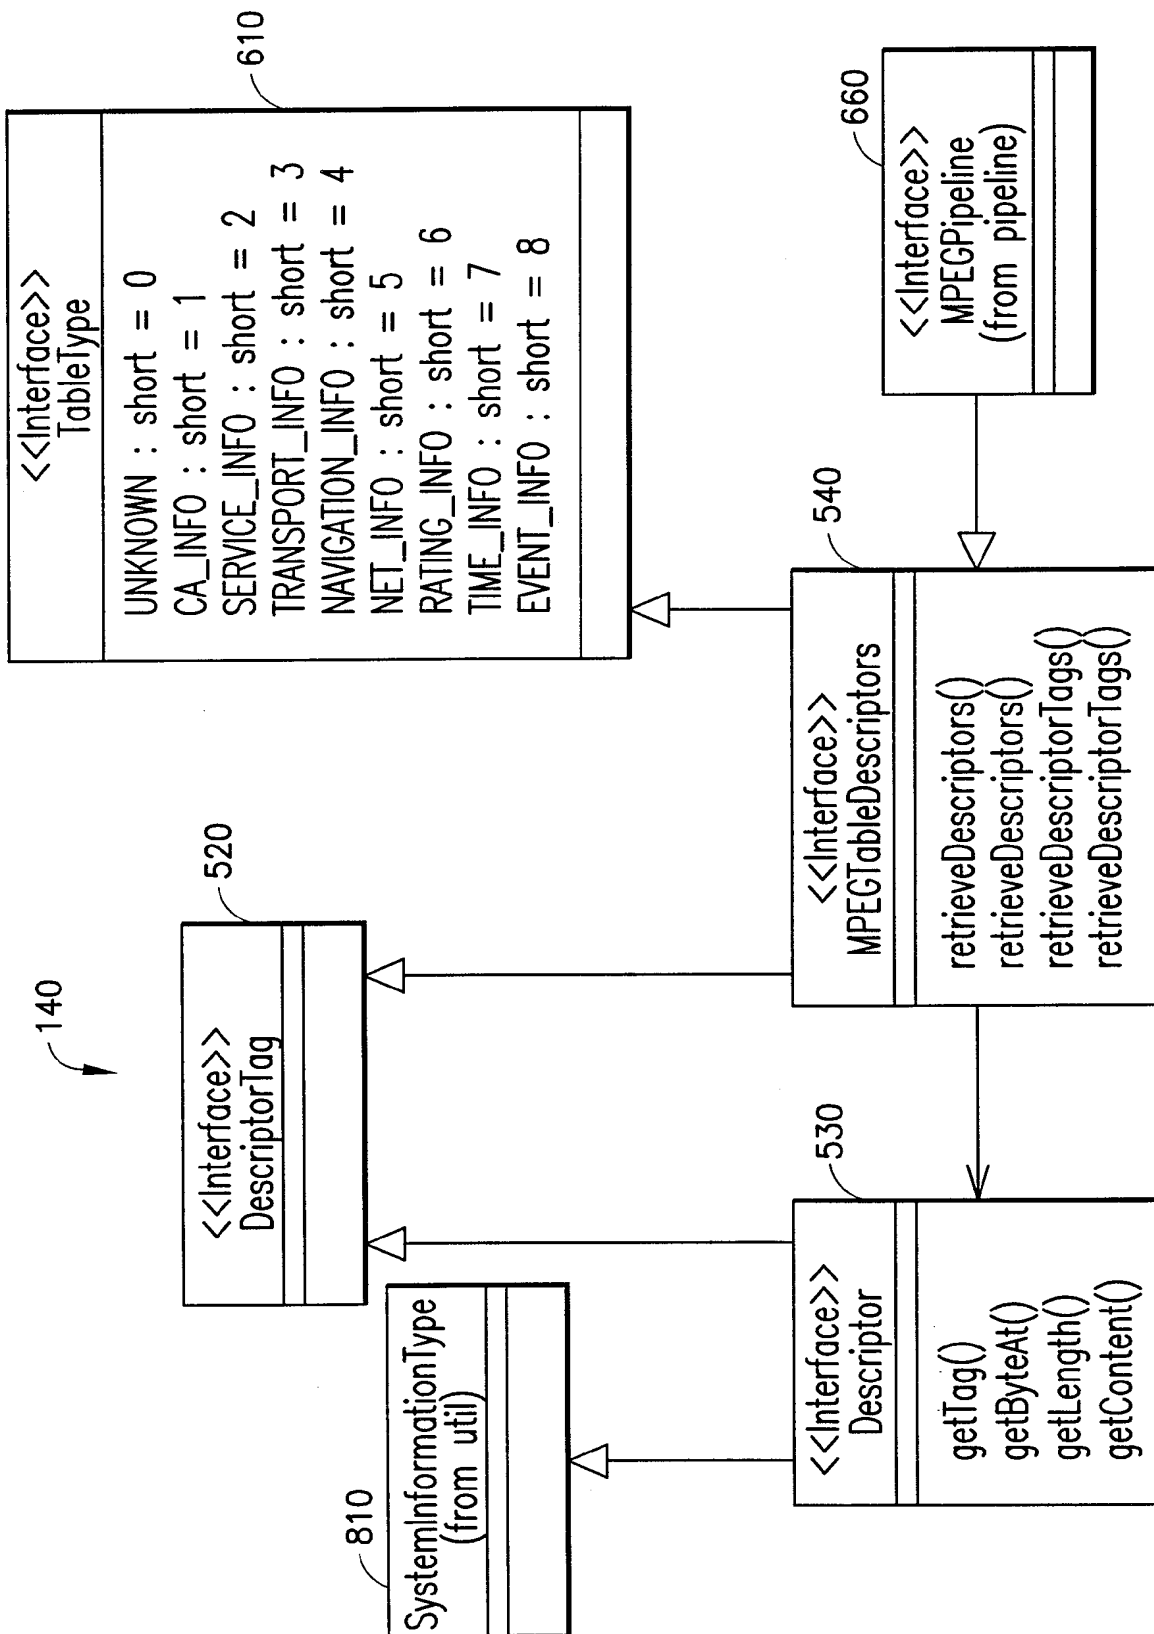


FIG.5



8/12

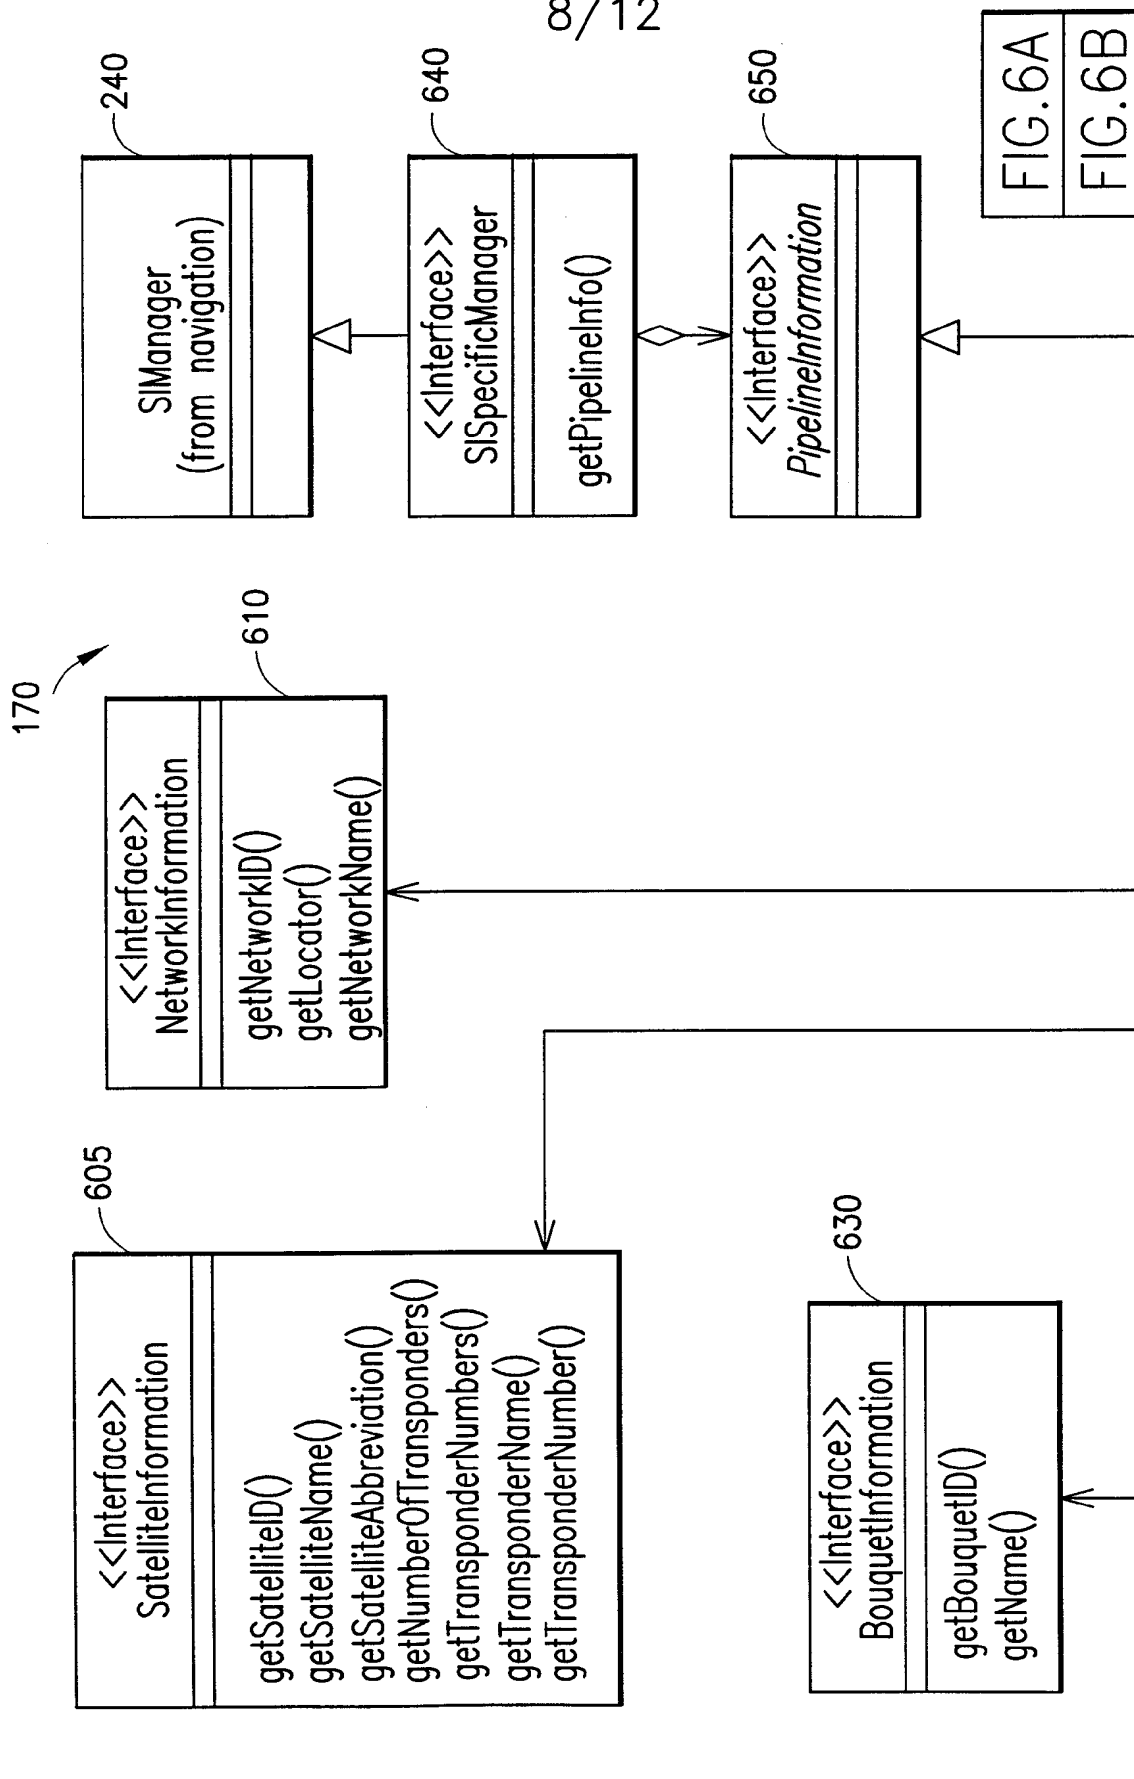


FIG. 6A

FIG. 6

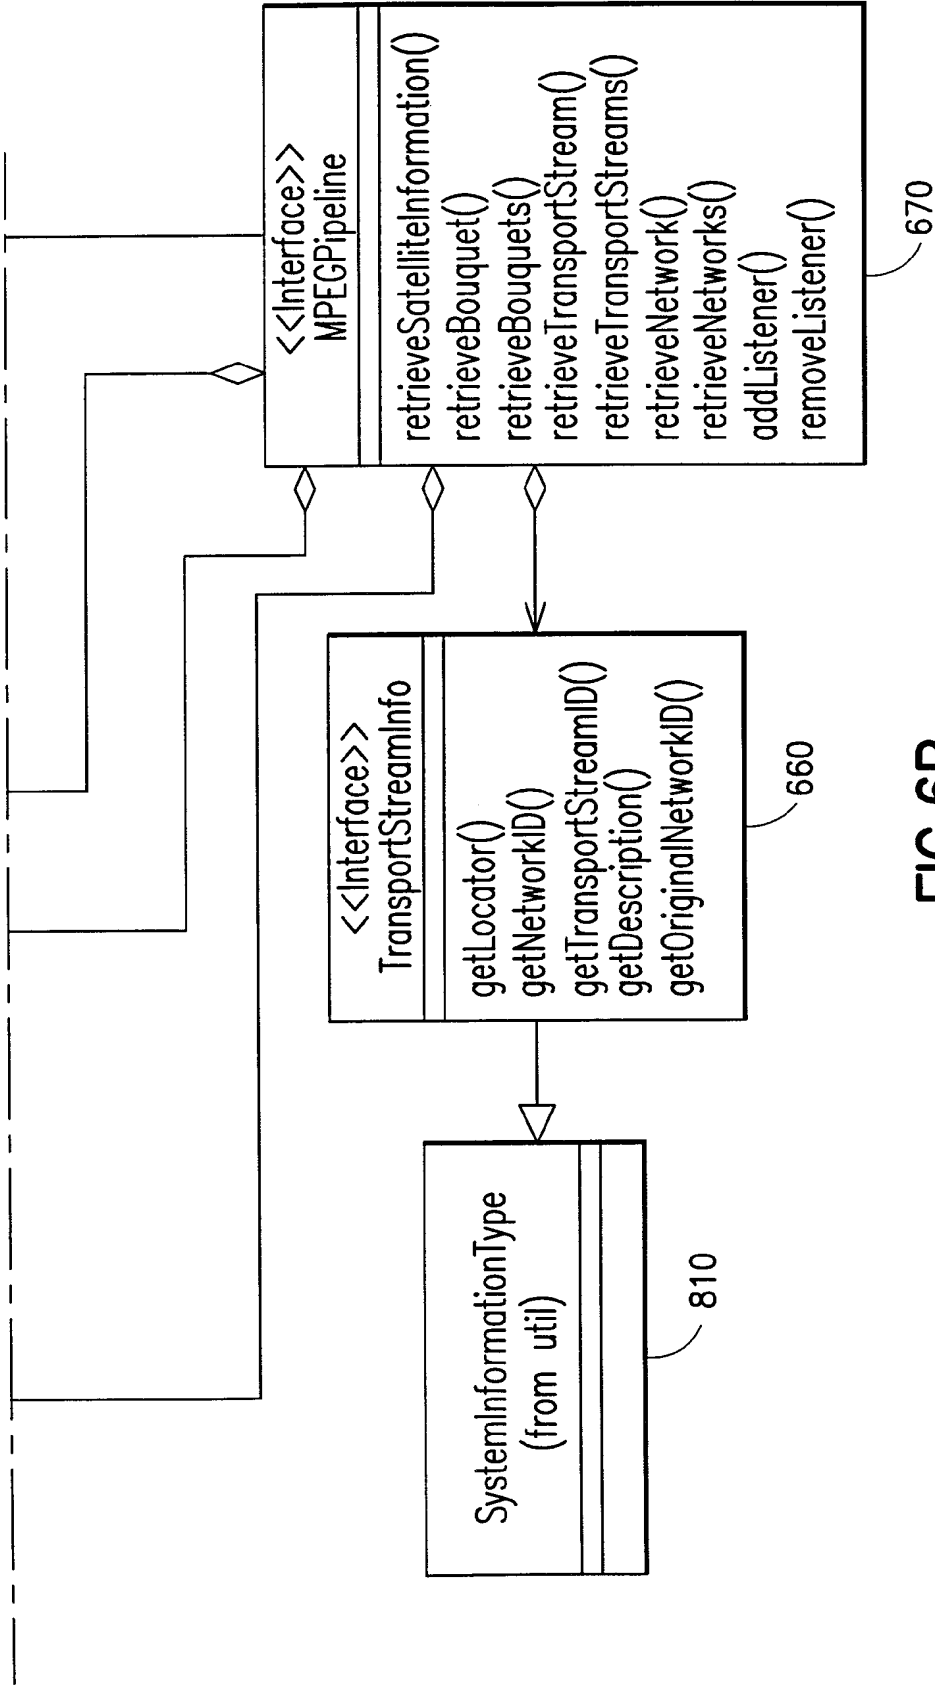


FIG.6B

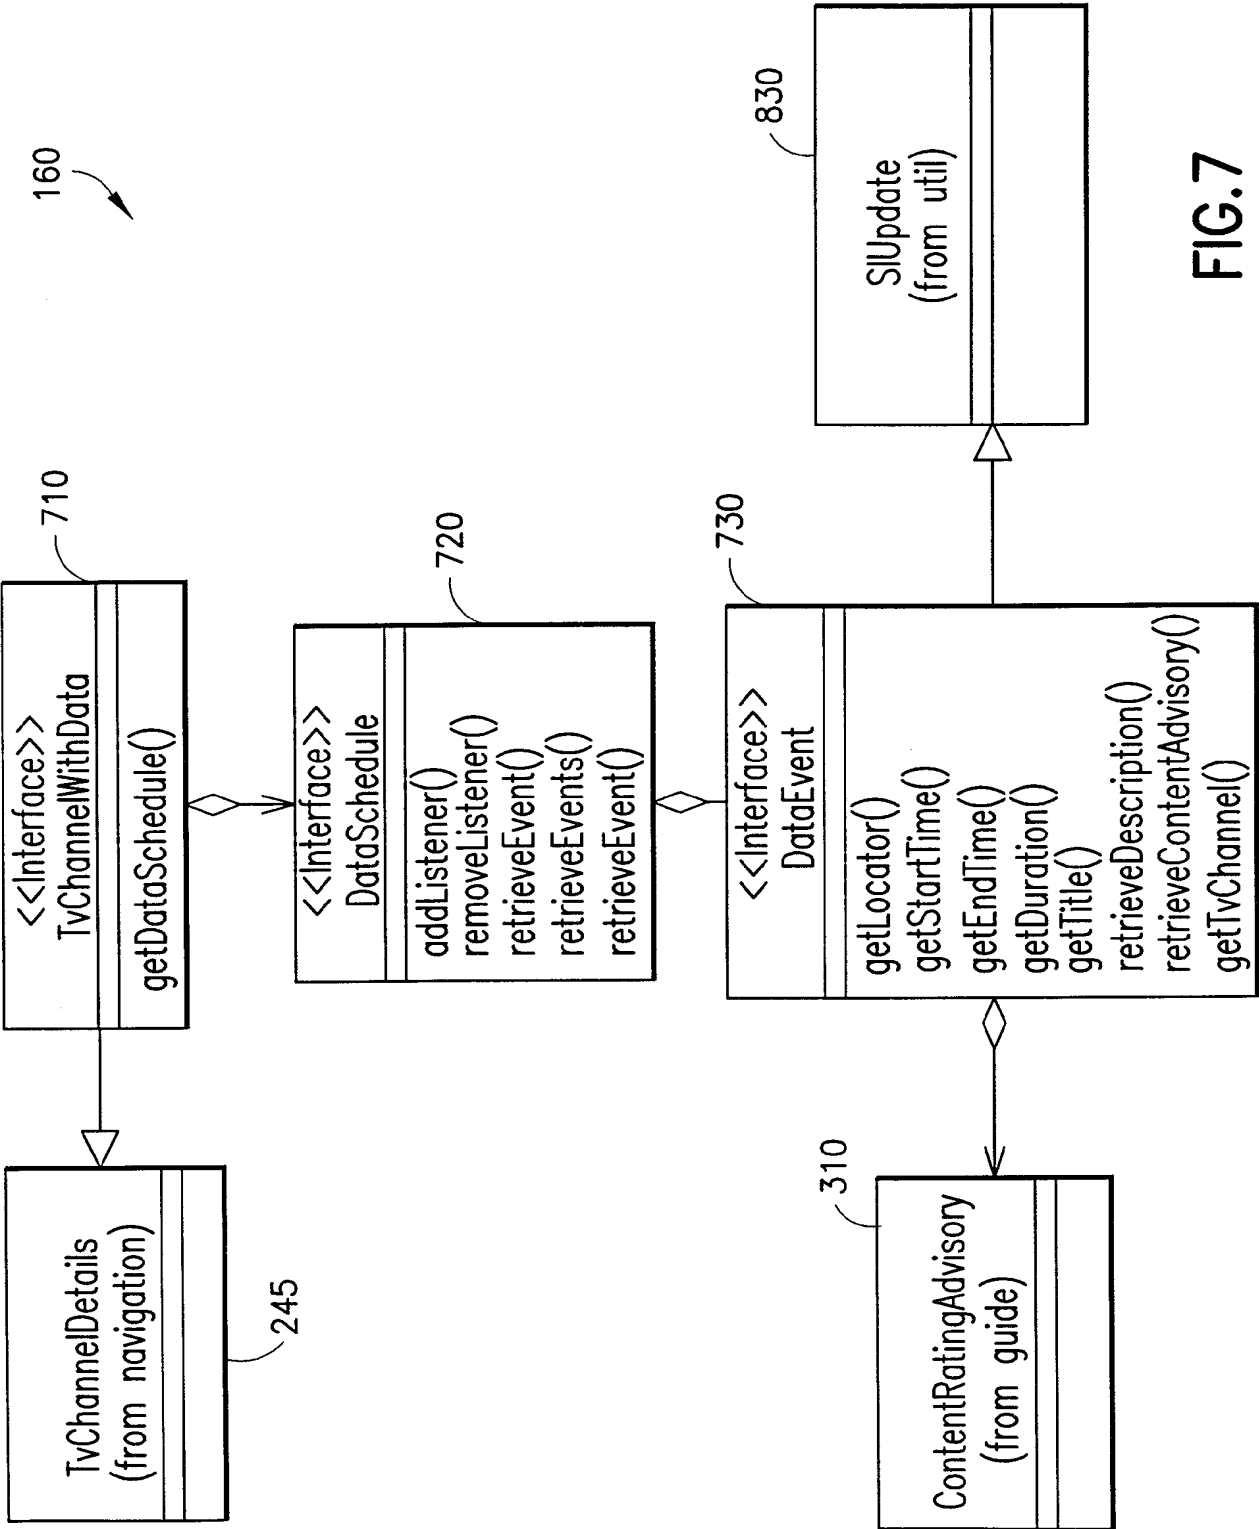


FIG. 7

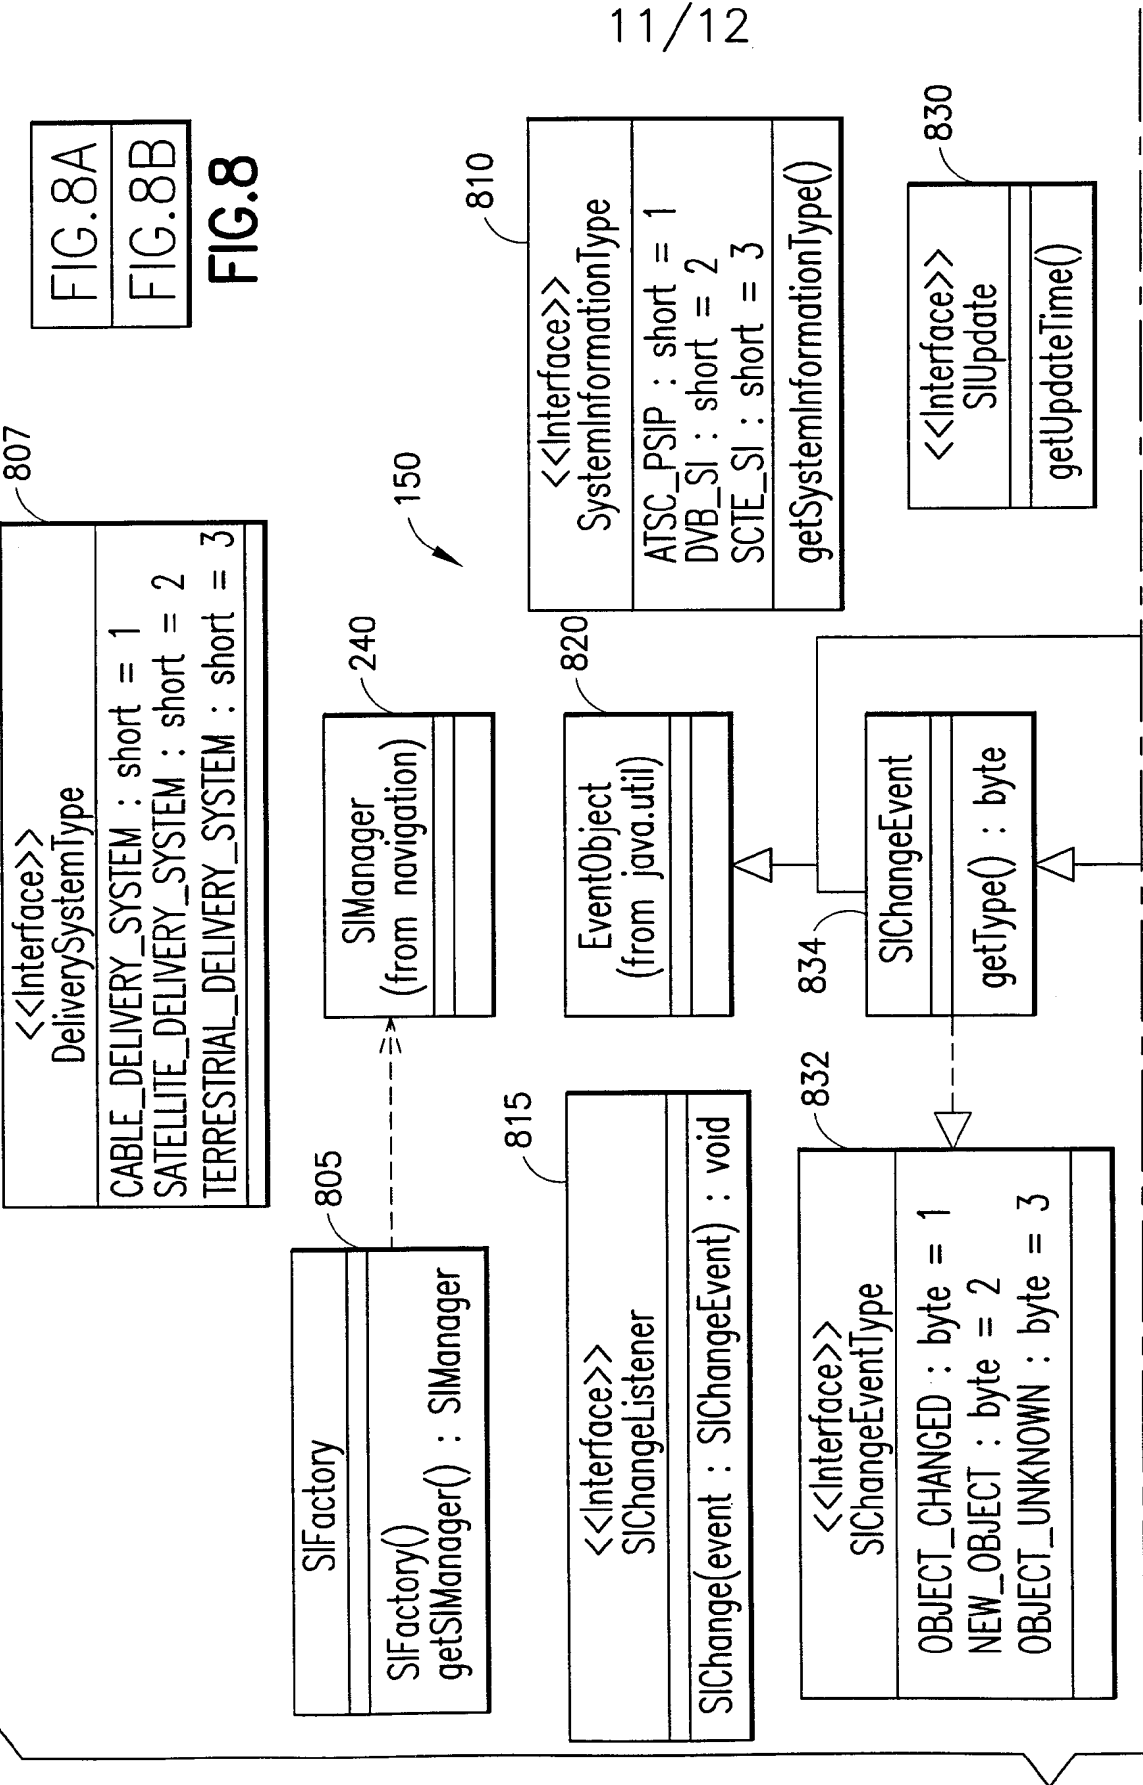


FIG. 8A

FIG. 8B

FIG. 8

FIG. 8A

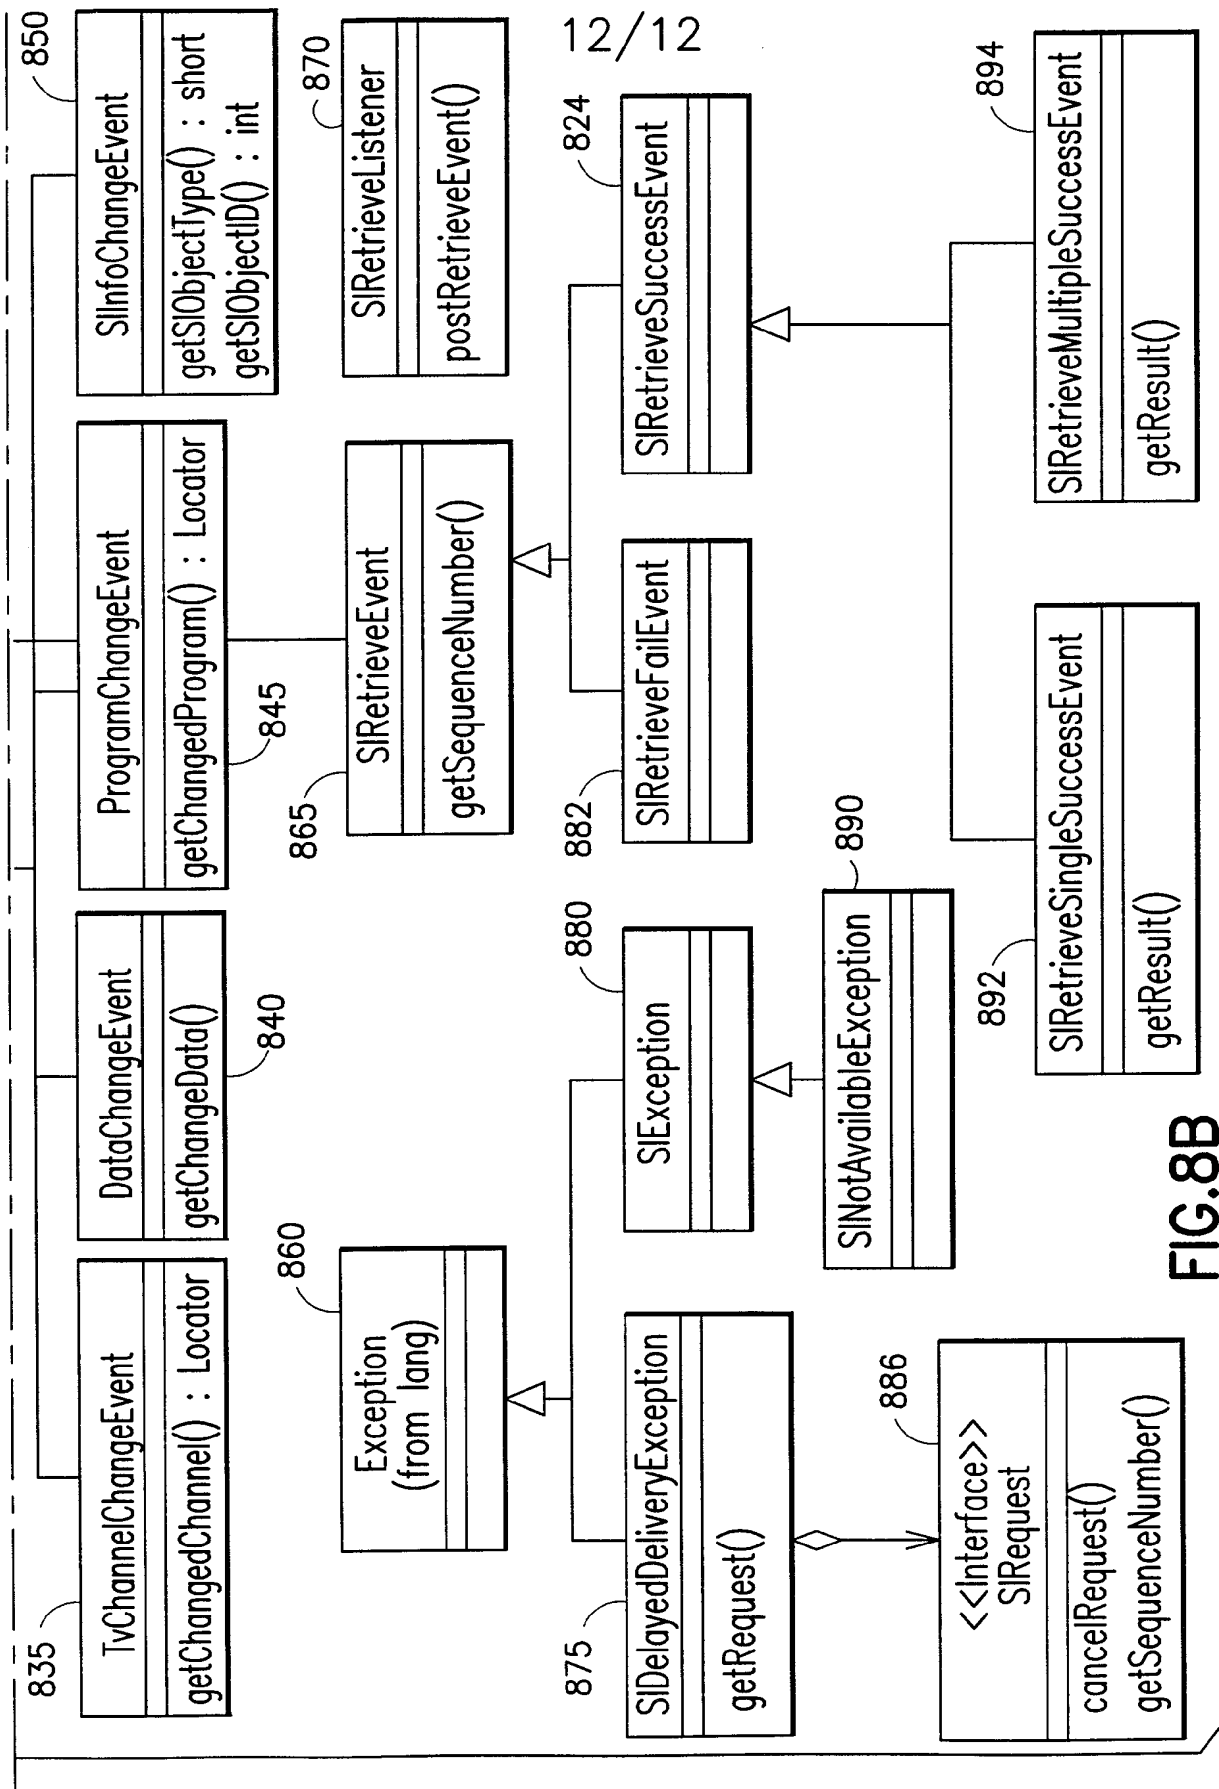


FIG. 8B

# INTERNATIONAL SEARCH REPORT

International Application No.

PCT/US 99/25322

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 H04N7/00 H04N7/24 H04N5/00

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>EVAIN J -P: "THE MULTIMEDIA HOME PLATFORM"</p> <p>EBU REVIEW- TECHNICAL, BE, EUROPEAN BROADCASTING UNION. BRUSSELS, no. 275, 21 March 1998 (1998-03-21), pages 4-10, XP000767493</p> <p>ISSN: 0251-0936</p> <p>page 8, left-hand column, paragraph 5</p> <p>-middle column, paragraph 3</p> <p>page 10, left-hand column, paragraph 5</p> <p style="text-align: center;">--- -/--</p>	<p>1-4, 8, 10, 21</p>

☒ Further documents are listed in the continuation of box C.

☐ Patent family members are listed in annex.

### \* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

29 February 2000

Date of mailing of the international search report

09/03/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Sindic, G

# INTERNATIONAL SEARCH REPORT

International Application No  
 PCT/US 99/25322

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>BUNGUM O W: "TRANSMULTIPLEXING, TRANSCONTROL AND TRANSSCRAMBLING OF MPEG-2/DVB SIGNAL"</p> <p>INTERNATIONAL BROADCASTING CONVENTION, 12 September 1996 (1996-09-12), pages 288-293, XP002040478</p> <p>page 290, left-hand column, paragraph 2</p> <p>right-hand column, paragraph 1</p> <p style="text-align: center;">----</p>	1,12,21
A	<p>"ETR 211: Digital Video Broadcasting; Guidelines on implementation and usage of Service Information (SI)"</p> <p>ETSI TECHNICAL REPORT, August 1997 (1997-08), pages 1-42, XP002131839</p> <p>page 10; figure 1</p> <p>page 37, paragraph 3 - paragraph 6</p> <p>page 40, paragraph 1 - paragraph 5</p> <p style="text-align: center;">-----</p>	9,12,19